



NATIONAL GUARD  
PRODUCTS

# Allseal® Smoke-Rated Astragal Seal Set 9115





### Material

Aluminum alloy 6063, T5 temper  
Synthetic rubber polymer: Siloxane closed cell sponge  
Silicone plus is tan

- Premium grade seals specially formulated to withstand greater temperature extremes while providing maximum protection against air infiltration
- Excellent flexibility and memory
- Flame resistant
- Moisture resistant
- Temperature range -100°F to 500°F, remains flexible at extreme temperatures
- Excellent resistance to ozone, UV and aging
- Recommended for areas using FM200 or Halon Fire Suppression Systems
- BHMA Certified to ANSI/BHMA A156.22 performance tests for heat, cold, air infiltration and smoke infiltration
- Fire-rated Astragal Seals cannot replace any astragal required on the door by the door manufacturer to maintain its fire label
- IBC, NFPA 80, NFPA105, and NFPA 252 require the gap at the meeting edge between fire labeled doors must not exceed 1/8"
- #6 x 3/4" stainless steel sheet metal screws furnished
- Screw holes slotted for adjustment
- Order as set to receive two pieces

### Finishes

9115A Anodized Aluminum  
9115B Gold  
9115DKB Dark Bronze

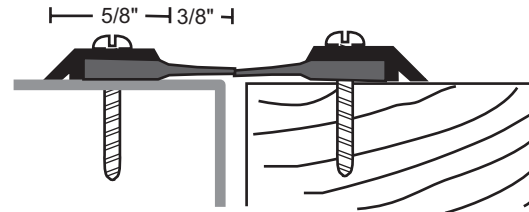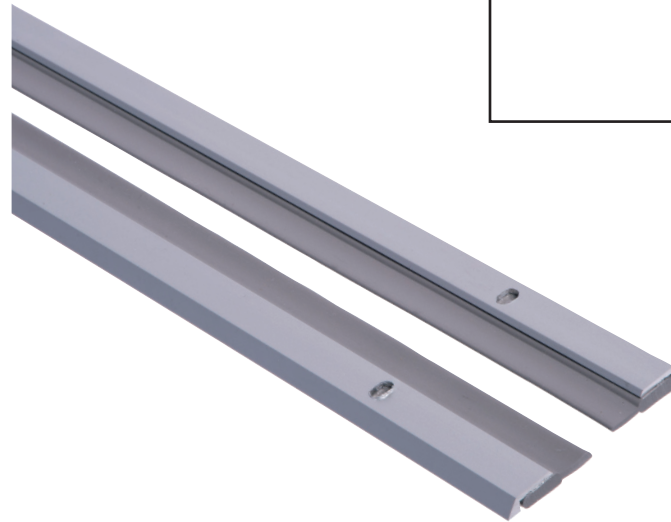

<b>Project:</b>
<b>Submitted by:</b>
<b>Date:</b>
<b>Notes:</b>