



9220WH

Excessive Clearance Door Bottom, Up to 1 1/2" — 20 Minute

PRODUCT CUT SHEET

Gap Solution for Excessive Fire Door Bottom Clearance up to 20 Minutes NGP-Edge® Intumescent Door Sweep

- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ Aluminum End Caps
- ▶ Synthetic Polymer: Polyamide
- ▶ Excellent Abrasion Resistance, Flexibility and Memory
- ▶ Moisture-Resistant
- ▶ Restricts the Passage of Smoke
- ▶ Flame-Resistant
- ▶ Temperature Range -70°F to 425°F
- ▶ Up to 20-Minute Rated — for Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- ▶ Certified for Use in US and Canada
- ▶ Available in 36", 48" Lengths (Can be Cut Down in Field)
- ▶ Non-Handed
- ▶ Screw Holes Slotted for Adjustment
- ▶ #6 x 3/4" Stainless Steel SMS Furnished




FINISHES:

9220WHA	Anodized Aluminum	Gray Brush
9220WHDKB	Dark Bronze/Black Anodized	Black Brush



UL CERTIFIED FOR USE IN THE US AND CANADA

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

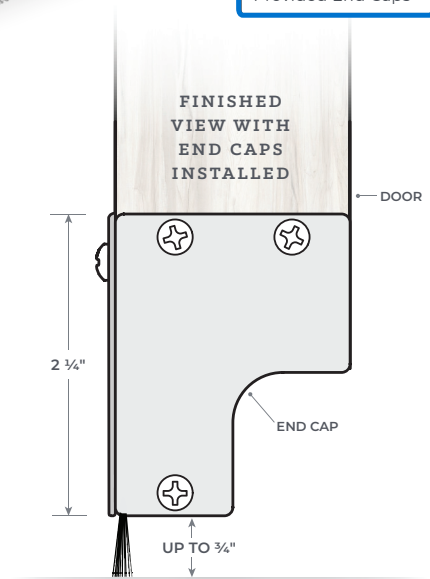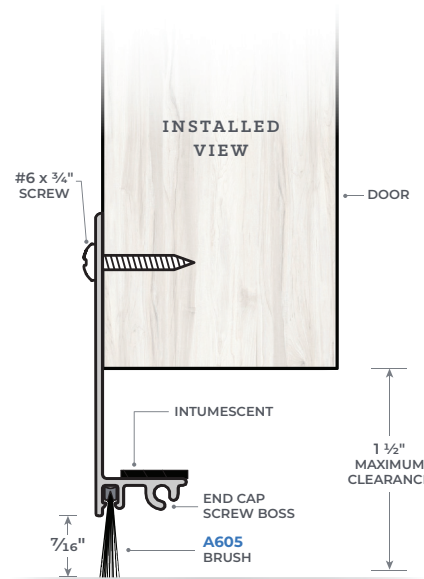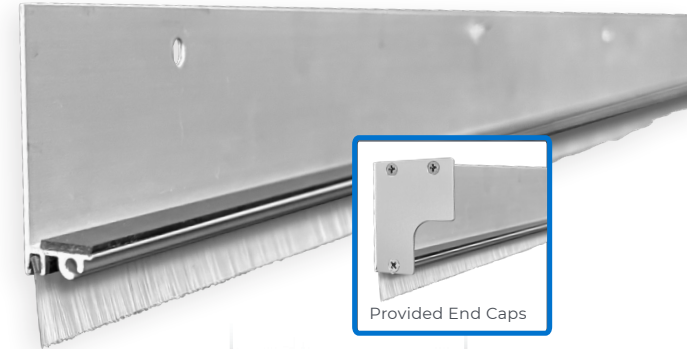

NGP-GAP-9220-PCS-0126-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH