



9500

NPG-Edge® Intumescent Fire Seal

PRODUCT CUT SHEET

Material

Self-Adhesive Intumescent with PVC Cover

- ▶ NPG-Edge® Sealing System/Smoke and Draft Control Gasketing Category “G” Classified
- ▶ NPG Intumescent Materials are Formulated to Expand at 375°F to 400°F Up To 8-10 Times Their Original Thickness; Completely Sealing the Gap Around and Between Doors During a Fire
- ▶ Moisture Resistant
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Modified Acrylic Pressure Sensitive Adhesive Protected by Release Liner
- ▶ Provides High Initial Adhesion and Long Term Holding Power for Permanent Mounting in Exterior or Interior Locations
- ▶ Resistant to Aging, Weathering, UV Radiation, Water, Detergent, Alcohol and the Influence of Chemicals
- ▶ End Use Temperature Range of Adhesive, Long Term Exposure -30°F Up To 250°F
- ▶ Shelf Life of Adhesive Prior to Installation is One Year When Stored at 75°F and 50% Relative Humidity or Less
- ▶ Flame Resistant
- ▶ Temperature Range -60°F To 275°F
- ▶ Anti-Microbial: Treated With an Anti-Microbial Additive to Inhibit the Growth of Microorganisms
- ▶ REACH and RoHS Compliant
- ▶ 1 9/16" Wide x 5/64" Tall
- ▶ Available in 36", 48", 84", 96 and 108" Lengths
- ▶ U.S. Pat. DES 417,739

Color



9500 Gray
 9500DKB Brown



20, 45, 60, 90 minute rated category B wood doors up to:

single swing 4'0" x 9'0", perimeter application
 pairs 8'0" x 9'0", perimeter/meeting edge

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

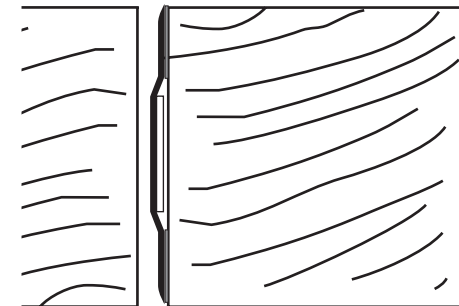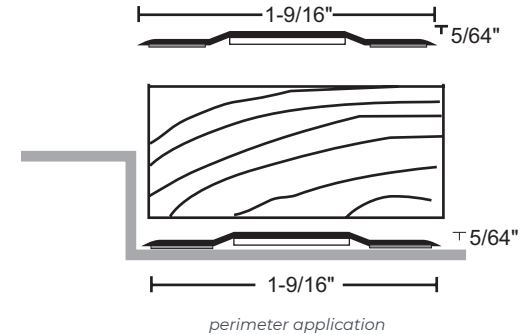

NGP-GKT-9500-PCS-1120-A