



951

Interlocking Ramp Component

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material and Features

Aluminum Alloy 6063, T5 Temper

- ▶ 3" Wide x 1 $\frac{3}{4}$ " Tall
- ▶ BHMA Certified to ANSI/BHMA A156.21 1,000 Lb. Load Test
- ▶ Typical Wall Thickness: .110"
- ▶ Weight: .71 Lbs./Ft.
- ▶ #10 FH Zinc Plated Wood Screws Included



** When installed as part of interlocking ramp assembly*

Finishes

Mill Finish

DKB - Dark Bronze Finish

Options

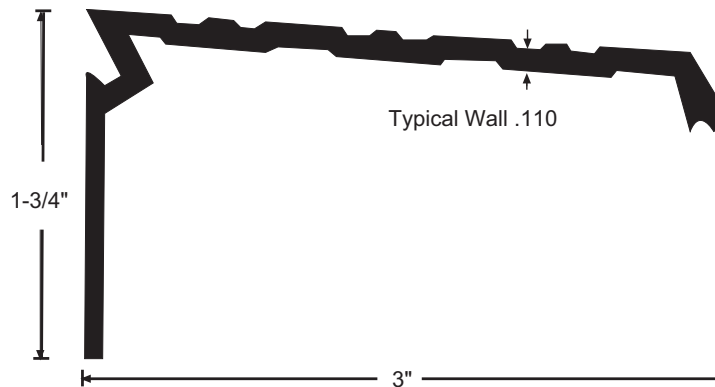

NGP-THR-951-PCS-1023-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH