



9545V

Excessive Clearance Door Bottom, Up to 1 1/2" — 45 Minutes

PRODUCT CUT SHEET

Gap Solution for Excessive Fire Door Bottom Clearance up to 45 Minutes NGP-Edge® Intumescent Door Shoe

- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ Aluminum End Caps for 9545 and 9220
- ▶ Thermo-Plastic Vulcanizate (TPV)
- ▶ Moisture-Resistant
- ▶ Restricts the Passage of Smoke
- ▶ Flame-Resistant
- ▶ Temperature Range -40°F to 250°F
- ▶ Up to 45-Minute Rated — for Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- ▶ Certified for Use in US and Canada
- ▶ Available in 36", 48" Lengths (Can be Cut Down in Field)
- ▶ Non-Handed
- ▶ Screw Holes Slotted for Adjustment
- ▶ #6 x 3/4" Stainless Steel SMS Furnished

FINISHES:

9545VA	Anodized Aluminum	Black Vinyl
9545VDKB	Dark Bronze/Black Anodized	Black Vinyl





UL CERTIFIED FOR USE IN THE US AND CANADA

PROJECT:
SUBMITTED BY:
DATE:
NOTES:



Provided End Caps

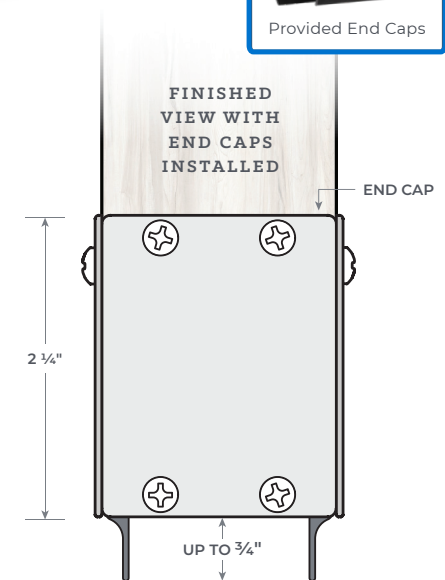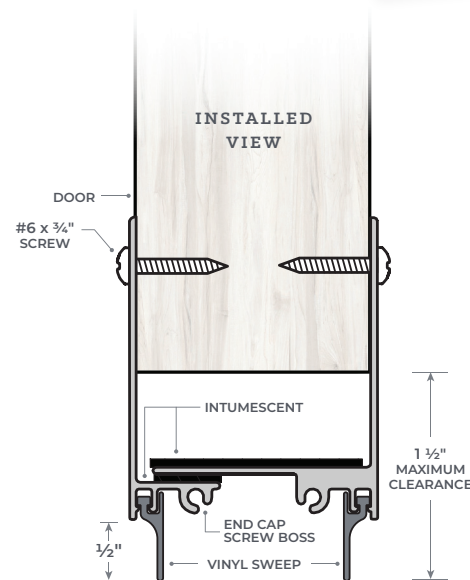

NGP-GAP-9545-PCS-0126-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH