



# 9545WH

Excessive Clearance Door Bottom, Up to 1 1/2" — 45 Minute

## PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

**Gap Solution for Excessive Fire Door  
Bottom Clearance up to 45 Minutes  
NGP-Edge® Intumescent Door Shoe**




UL CERTIFIED FOR USE IN THE US AND CANADA

- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ Aluminum End Caps for 9545 and 9220
- ▶ Synthetic Polymer: Polyamide
- ▶ Excellent Abrasion Resistance, Flexibility and Memory
- ▶ Moisture-Resistant
- ▶ Restricts the Passage of Smoke
- ▶ Flame-Resistant
- ▶ Temperature Range -70°F to 425°F
- ▶ Up to 45-Minute Rated — for Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- ▶ Certified for Use in US and Canada
- ▶ Available in 36", 48" Lengths (Can be Cut Down in Field)
- ▶ Non-Handed
- ▶ Screw Holes Slotted for Adjustment
- ▶ #6 x 3/4" Stainless Steel SMS Furnished

**FINISHES:**

9545WHA	Anodized Aluminum	Gray Brush
9545WHDKB	Dark Bronze/Black Anodized	Black Brush

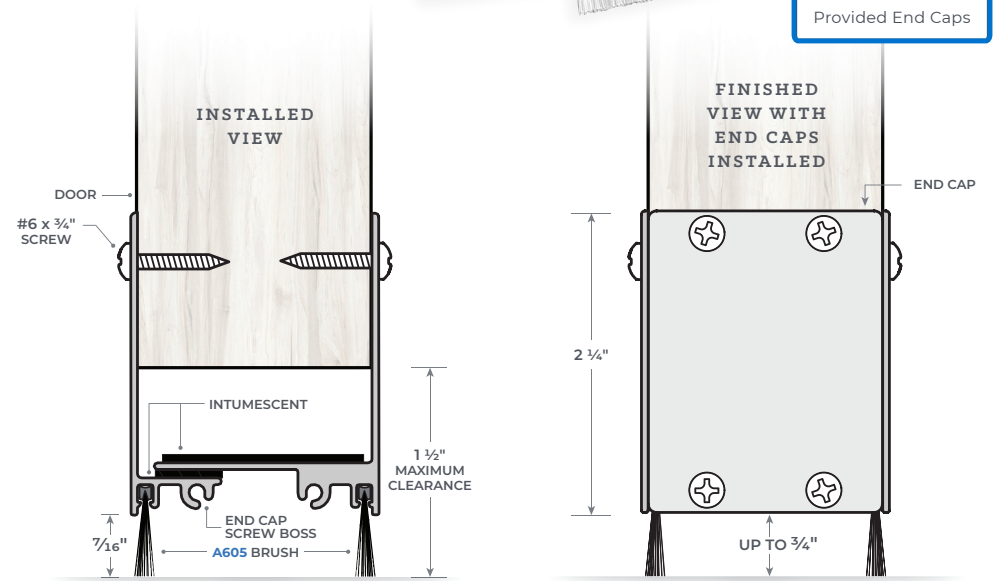

NGP-GAP-9545-PCS-0126-A

**NATIONAL GUARD PRODUCTS, INC.**

**MEMPHIS**

4985 East Raines Road  
Memphis, TN 38118

**CARSON CITY**

3689 Arrowhead Drive  
Carson City, NV 89706

**Fax:** (800) 255-7874

**Email:** info@ngp.com

**Quotes:** quotes@ngp.com

**Orders:** orders@ngp.com

**ngp.com**  
1-800-NGP-RUSH