

9545

EXCESSIVE CLEARANCE DOOR BOTTOM




UL CERTIFIED FOR USE IN THE US AND CANADA


Gap Solution for Excessive Fire Door Bottom Clearance up to 45 Minutes
NGP-Edge® Intumescent Door Shoe.
UL Certified for Door Bottom Gaps — Measuring up to 1½".

PRODUCT INFORMATION

- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ Aluminum End Caps for 9545 and 9220
- ▶ Vinyl (V) is Thermo-Plastic Vulcanizate (TPV), Brush (WH) is Synthetic Polymer: Polyamide
- ▶ Moisture-Resistant
- ▶ Restricts the Passage of Smoke
- ▶ Flame-Resistant
- ▶ Temperature Range -40°F to 250°F
- ▶ Up to 45-Minute Rated — for Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- ▶ Certified for Use in US and Canada
- ▶ Available in 36", 48" Lengths (Can be Cut Down in Field)
- ▶ Non-Handed
- ▶ Screw Holes Slotted for Adjustment
- ▶ #6 x ¾" Stainless Steel SMS Furnished

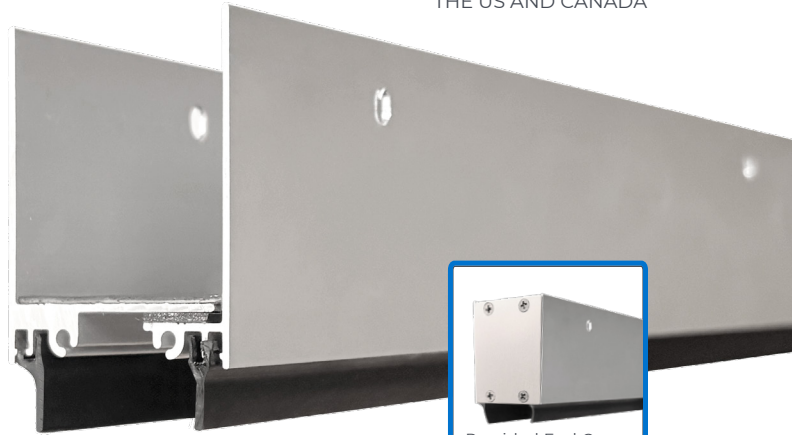

Pictured: 9545V

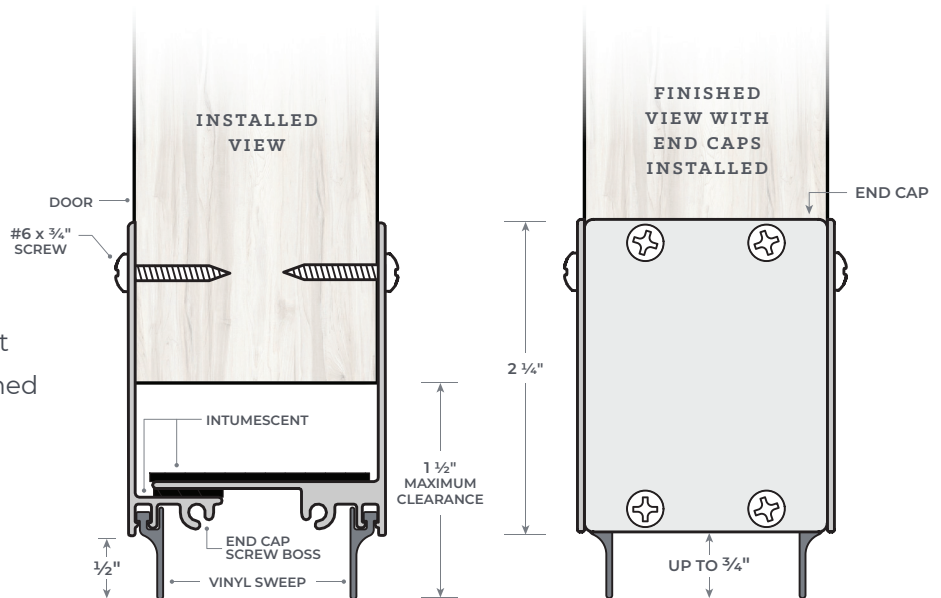

POSITIVE PRESSURE TESTED
 MISCELLANEOUS FIRE DOOR
 ACCESSORY

9545VA	ANODIZED ALUMINUM	BLACK VINYL
9545VDKB	DARK BRONZE/BLACK	BLACK VINYL
9545WHA	ANODIZED ALUMINUM	GRAY BRUSH
9545WHDKB	DARK BRONZE/BLACK	BLACK BRUSH