


9590

DOOR BOTTOM GAP SOLUTION

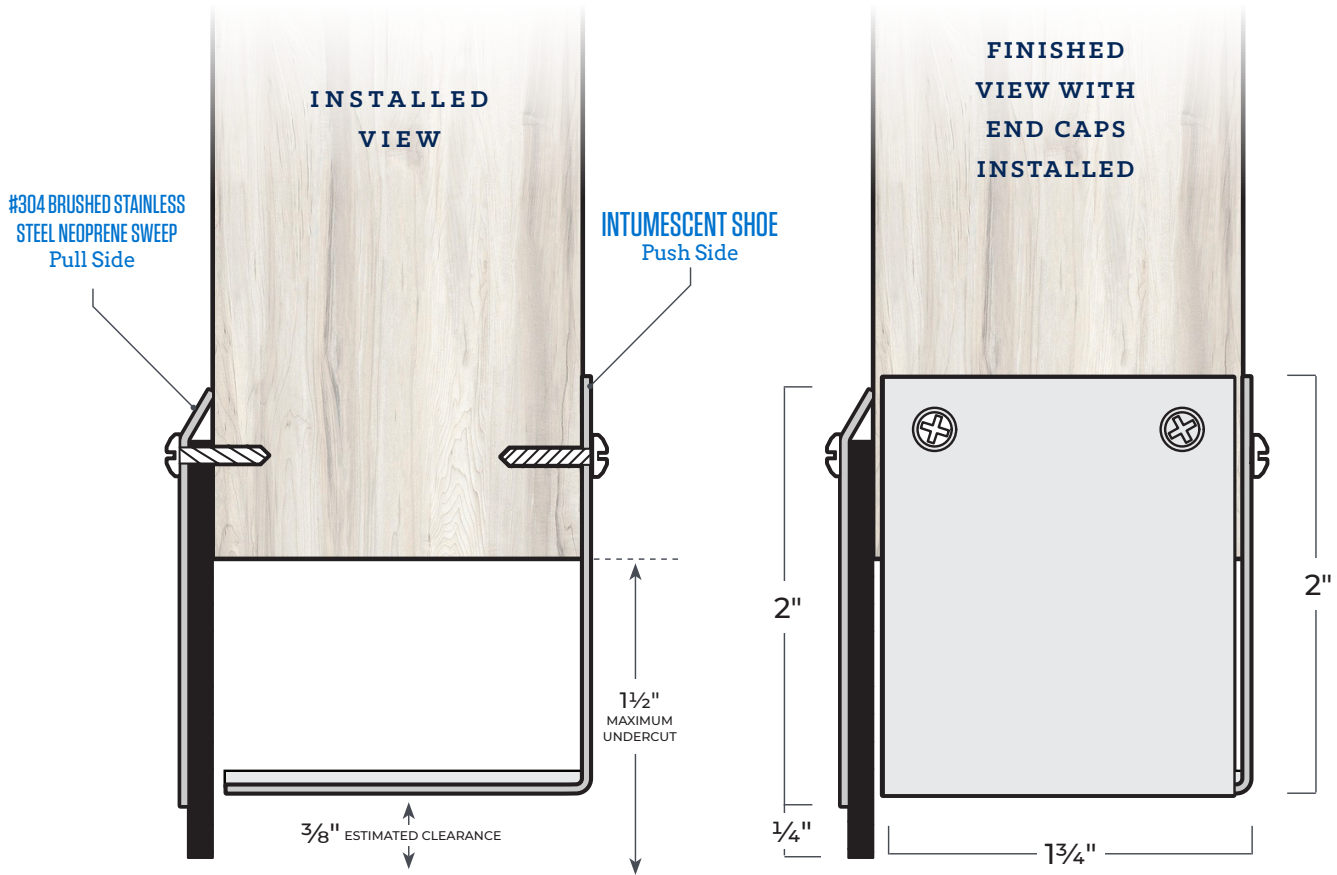

PRODUCT INFORMATION

UL Certified for Door Bottom Gaps — Measuring up to 1 1/2".

- Restricts the passage of smoke
- 90-Minute Rated — for use on UL10B and UL10C wood or hollow metal fire doors
- Patent Pending
- Available in 36" and 48" Lengths
- Non-Handed

PRODUCT CONSISTS OF:

- + #304 Brushed Stainless Steel Neoprene Sweep — Pull Side
 - + #304 Brushed Stainless Steel Intumescent Shoe — Push Side
 - + #304 Brushed Stainless Steel End Caps
 - + #6 x 3/4" Stainless Steel SMS Furnished
- Brushed stainless steel
Neoprene is black*