



9675

ALLSEAL® SMOKE-RATED ASTRAGAL SEAL SET

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

Aluminum Alloy 6063, T5 Temper
Synthetic Polymer: Polyamide
Nylon Brush Plus


- ▶ Premium Grade Seals Specially Formulated to Withstand Greater Temperature Extremes While Providing Maximum Protection Against Air Infiltration
- ▶ Excellent Abrasion Resistance, Flexibility and Memory
- ▶ Moisture Resistant
- ▶ Retains Insecticides Well
- ▶ Temperature Range -70°F To 425°F
- ▶ REACH and RoHS Compliant
- ▶ Not Effective Against Water Penetration
- ▶ Fire-rated Astragal Seals Cannot Replace any Astragal Required on the Door by the Door Manufacturer to Maintain its Fire Label
- ▶ IBC, NFPA 80, NFPA105, and NFPA 252 Require the Gap at the Meeting Edge Between FireLabeledDoors Must Not Exceed 1/8"
- ▶ #6 X 3/4" Stainless Steel Sheet Metal Screws Furnished
- ▶ Screw Holes Slotted for Adjustment
- ▶ Order as Set to Receive Two Pieces

Finishes

9675A	Anodized Aluminum	Gray Nylon Brush Plus
9675B	Gold	Black Nylon Brush Plus
9675DKB	Dark Bronze	Black Nylon Brush Plus

Options

FATT - Fast Attach Tape

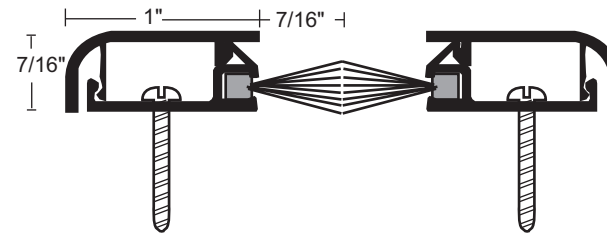

NGP-GKT-9675SET-PCS-0720-A