



9706E

Perimeter Seal Compatible with Parallel Arm Closers

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:


Material

Aluminum Alloy 6063, T5 Temper
Synthetic Polymer: Polyamide
Nylon Brush Plus

- ▶ Premium Grade Seals Specially Formulated to withstand Greater Temperature Extremes while Providing Maximum Protection Against Air Infiltration
- ▶ Excellent Abrasion Resistance, Flexibility and Memory
- ▶ Moisture-Resistant
- ▶ Retains Insecticides Well
- ▶ Temperature Range -70°F to 425°F
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Smoke Infiltration in Most Common Profiles as Indicated by BHMA Certified Symbol
- ▶ REACH and RoHS Compliant
- ▶ Not Effective Against Water Penetration
- ▶ No Break-in Seal for Closer Mounting
- ▶ Closer and/or Overhead Holder Attach to Frame Through Weatherseal Section. Install Seal First
- ▶ Allows Mounting of Rim Exit Device Strikes Without Notching Gasketing
- ▶ Head Section Not Drilled
- ▶ Jamb Sections Furnished With Slotted Holes for Adjustment
- ▶ Self-Drilling #8 (Tek Type) Screws Furnished

Finishes

9706E Mill Aluminum Gray Brush
9706EDKB Dark Bronze Black Brush

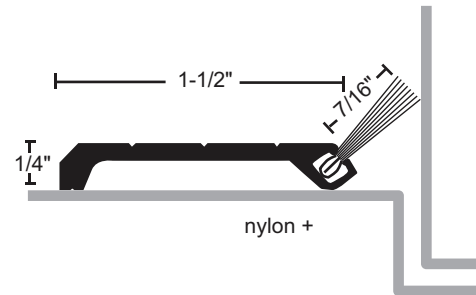

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

NGP-GKT-9706E-PCS-0323-A

ngp.com
1-800-NGP-RUSH