


9990

FIRE DOOR TOP GAP SOLUTION

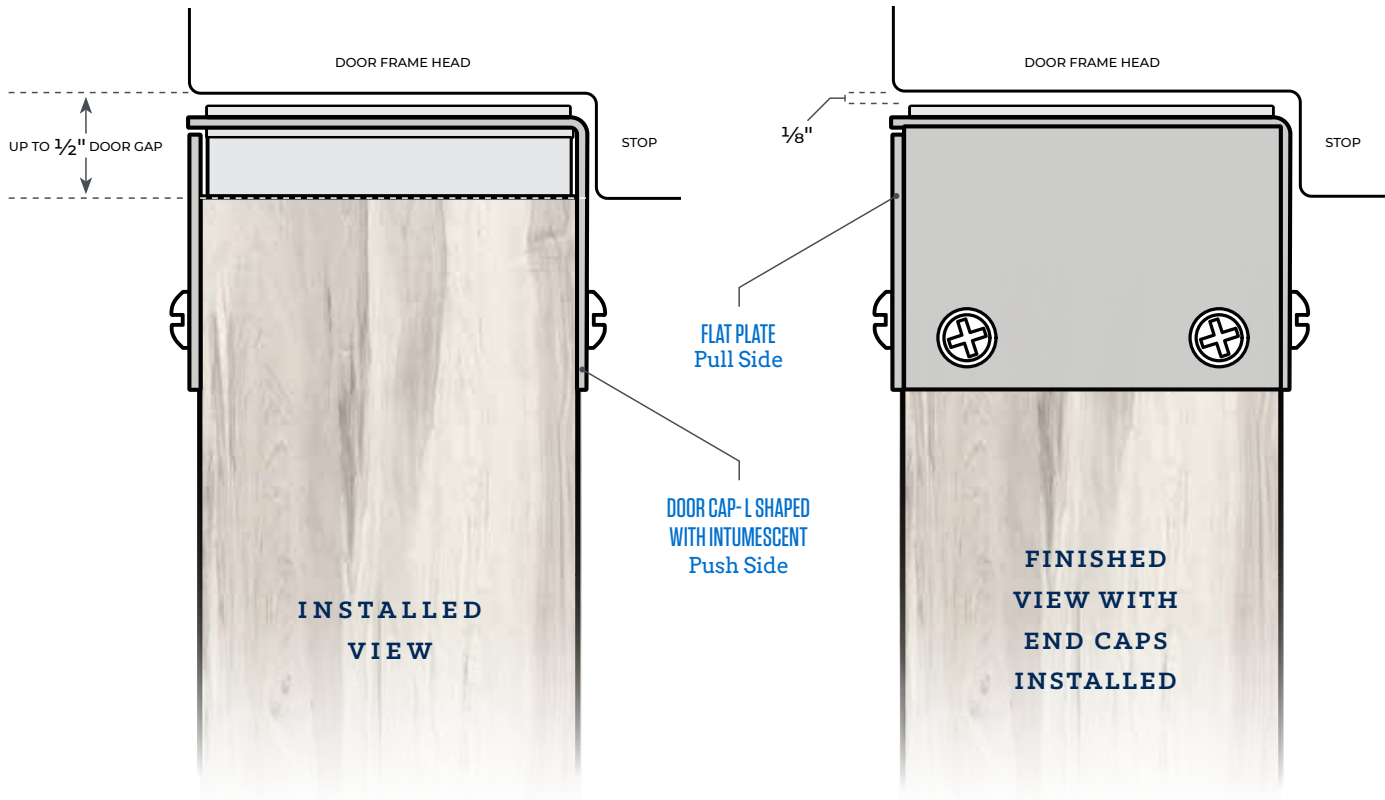

PRODUCT INFORMATION

UL Certified for Door Top Gaps — Measuring up to 1/2".

- ▶ 90-Minute Rated — for use on UL10B and UL10C wood or hollow metal fire doors
- ▶ Recommended for doors with parallel arm closers
- ▶ Patent Pending
- ▶ Available in 36" and 48" lengths
- ▶ Brushed stainless steel
- ▶ Non-handed

PRODUCT CONSISTS OF:

- + #304 Brushed Stainless Steel Flat Plate - Pull Side
- + #304 Brushed Stainless Steel Intumescent Cap — Push Side
- + #304 Brushed Stainless Steel End Caps
- + #6 x 3/4" Stainless Steel SMS Furnished