




# A605

Nylon Brush  
Seals

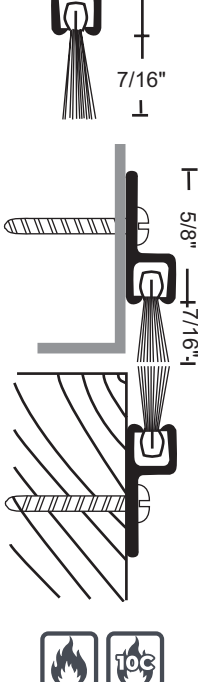

**BHMA**  
CERTIFIED

**NOT smoke for  
astragal sets**

*See [ngp.com](http://ngp.com) for  
All Applicable  
Certifications for  
this Product.*



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS RATED UP TO 1½ HOURS. CATEGORY H & J (CATEGORY H APPLIES TO PERIMETER AND DOOR SWEEP APPLICATIONS ONLY)

PERIMETER AND DOOR SWEEP APPLICATION IS SMOKE AND DRAFT CONTROL GASKETING (CATEGORY H) TESTED TO UL 1784; MEETS REQUIREMENTS OF NFPA 105, IBC FOR USE ON "S" LABEL DOORS.



**[ngp.com](http://ngp.com)**  
**1-800-NGP-RUSH**

FAX:  
(800) 255-7874


QUOTES:  
[quotes@ngp.com](mailto:quotes@ngp.com)

ORDERS:  
[orders@ngp.com](mailto:orders@ngp.com)



## INSTALLATION INSTRUCTIONS

### A605

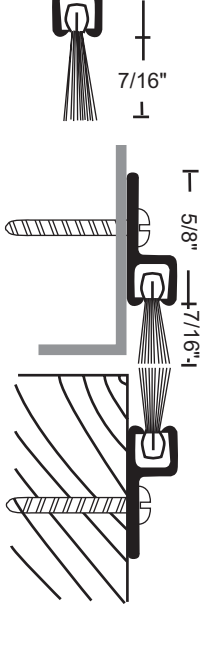

1. Remove brush from metal retainer.
2. Cut brush to fit opening, using the cutting section of pliers or diagonal cutters. If bristles are not secure, use a drop of adhesive to secure the brush.
3. Cut the metal retainer to length.
4. Replace brush in metal retainer.
5. With door closed, position seal and mark screw holes.
6. Drill pilot holes for screws with a  $\frac{7}{64}$ " bit.
7. Install with screws provided.
8. Slightly peen the bottom end of each retainer to secure the brush from moving.
9. Adjust position so brush is touching against door, but does not impede proper closing and latching of door.

**ngp.com**

**1-800-NGP-RUSH**

FAX: (800) 255-7874

QUOTES: [quotes@ngp.com](mailto:quotes@ngp.com)

ORDERS: [orders@ngp.com](mailto:orders@ngp.com)