

# AUTOMATIC DOOR BOTTOMS

## SURFACE


All Products on This Page:



### SLIMLINE


- Endurance Tested to 5 Million Cycles
- Available 23" to 96" in Length
- End Caps Furnished Standard
- Great for Sliding Doors
- Will Work Half Mortised on Swing or Sliding Doors

<b>780SA</b>	Gray Silicone
<b>780SDKB</b>	Gray Silicone

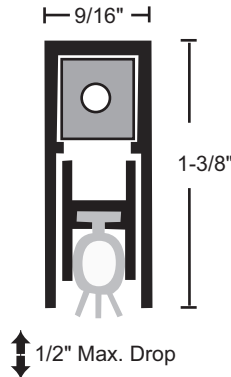

### 780SA

Anodized Aluminum Slimline Automatic Door Bottom with Silicone Seal

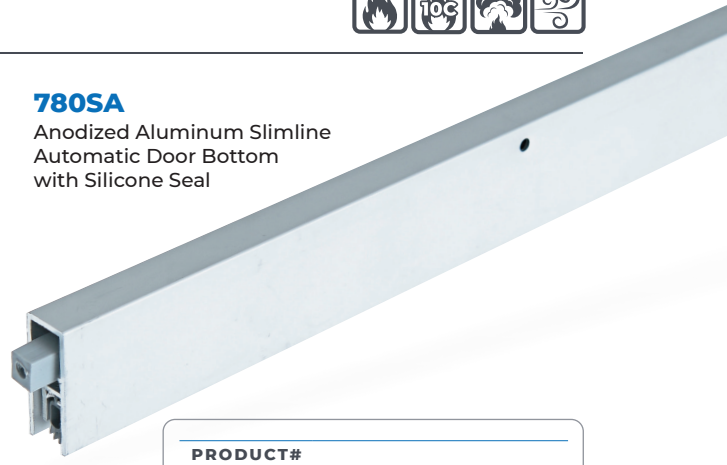

PRODUCT# SUFFIX	FINISH
<b>A</b>	Anodized Aluminum
<b>DKB</b>	Dark Bronze
<b>None</b>	Mill Aluminum

### STAINLESS STEEL

#### STAINLESS STEEL


<b>221NSS</b>	Black Neoprene <sup>(1, 2, 3)</sup>
---------------	-------------------------------------



<b>221SSS</b>	Gray Silicone <sup>(1, 2, 3)</sup>
---------------	------------------------------------



<b>221WHSS</b>	Black Nylon Brush <sup>(2)</sup>
----------------	----------------------------------

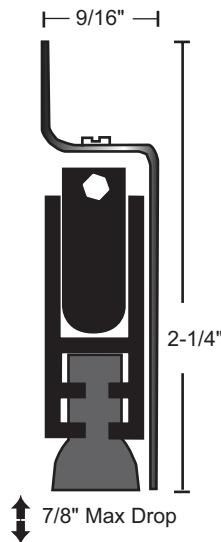

#### STAINLESS STEEL


<b>229NSS</b>	Black Neoprene <sup>(1, 2, 3)</sup>
---------------	-------------------------------------



<b>229SSS</b>	Gray Silicone <sup>(1, 2, 3)</sup>
---------------	------------------------------------



<b>229WHSS</b>	Black Nylon Brush <sup>(2)</sup>
----------------	----------------------------------

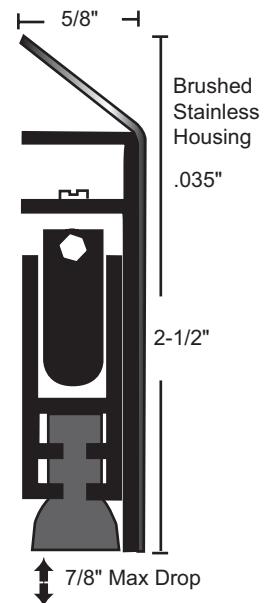

- 3/16" Thick Lead Insert Available – Specify "Lead-Lined".
- Door Bottom is Handed. Right Hand Supplied Unless Specified. Units Under 36" NOT Field Reversible. Please Specify Handing.
- BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1.**