

# AUTOMATIC DOOR BOTTOMS

## SURFACE

All Products on this Page:



- Mounts on Push Side of Door
- Use with a Threshold for Maximum Sealing Capability
- Nylon Brush Recommended for Carpet Applications where no Threshold is Provided
- Specify Exact Net Length Required to Avoid Field Sizing
- 36" and Longer may be Cut Up To 4" in the Field, under 36" should not be Cut in the Field, Order Net Length
- Minimum Length 11", Maximum Length 60" (Except 780)
- End Caps Furnished Standard. Models 220, 221, 229, 310 Require Door Handing, RH Supplied Standard Units Under 36" NOT Field Reversible. Please Specify Handing.

**220SA**  
Anodized Aluminum  
Automatic Door Bottom  
with Silicone Seal



PRODUCT# SUFFIX	FINISH
<b>A</b>	Anodized Aluminum
<b>B</b>	Gold
<b>DKB</b>	Dark Bronze
<b>None</b>	Mill Aluminum

## SURFACE

<b>220NA</b>	Black Neoprene (1, 2, 3)
<b>220NB</b>	Black Neoprene (1, 2, 3)
<b>220NDKB</b>	Black Neoprene (1, 2, 3)



<b>220SA</b>	Gray Silicone (1, 2, 3)
<b>220SB</b>	Gray Silicone (1, 2, 3)
<b>220SDKB</b>	Gray Silicone (1, 2, 3)



<b>220WHA</b>	Gray Nylon Brush (2)
<b>220WHB</b>	Black Nylon Brush (2)
<b>220WHDKB</b>	Black Nylon Brush (2)



<b>222NA</b>	Black Neoprene (1, 3)
<b>222NB</b>	Black Neoprene (1, 3)
<b>222NDKB</b>	Black Neoprene (1, 3)



<b>222SA</b>	Gray Silicone (1, 3)
<b>222SB</b>	Gray Silicone (1, 3)
<b>222SDKB</b>	Gray Silicone (1, 3)



<b>222WHA</b>	Gray Nylon Brush
<b>222WHB</b>	Black Nylon Brush
<b>222WHDKB</b>	Black Nylon Brush

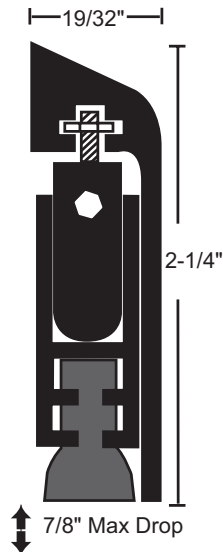



<b>310NA</b>	Black Neoprene (1, 2, 3)
<b>310NB</b>	Black Neoprene (1, 2, 3)
<b>310NDKB</b>	Black Neoprene (1, 2, 3)



<b>310SA</b>	Gray Silicone (1, 2, 3)
<b>310SB</b>	Gray Silicone (1, 2, 3)
<b>310SDKB</b>	Gray Silicone (1, 2, 3)



<b>310WHA</b>	Nylon Brush (2)
<b>310WHB</b>	Black Nylon Brush (2)
<b>310WHDKB</b>	Black Nylon Brush (2)

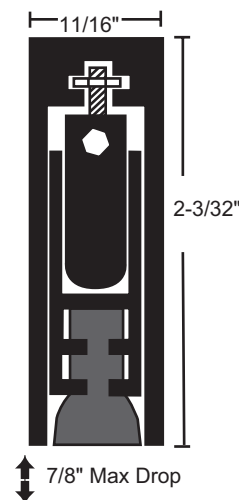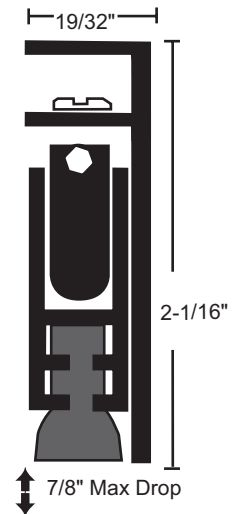

- 1/16" Thick Lead Insert Available - Specify "Lead-Lined".
- Door Bottom is Handed. Right Hand Supplied Unless Specified. Units Under 36" NOT Field Reversible. Please Specify Handing.
- BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1.