

SS304

Stainless Steel Continuous Hinge Half Mortise, for 1-3/4" Doors


Stainless steel continuous hinges run the full height of the door evenly distributing the weight of the door along the full height of the frame. Ideal for high frequency and heavy weight doors in new construction and retrofit applications.

- Heavy duty 14 gauge type 304 stainless steel
- Pin and barrel design
- Stainless steel hinge pins
- Medical type self-lubricating flanged bearings between each 2" knuckle provide dust-free quiet and smooth operation
- For doors weighing up to 600 lbs.
- 25 year warranty
- #1/4-20 x 3/4" TEK screws for metal frames
- #10 x 1/2" TEK screws for metal doors
- #10 x 1" wood screws for wood doors
- US32D (630) brushed finish
- Standard lengths: 83", 85", 95", 119"

Available Options:

- Torx security TEK Screws
- Cut to net length - specify door handing
- Anti-ligature welded hospital tip - specify "ALHT"
- Dutch door prep - specify door handing, bottom door leaf length, and clearance between leaves
- Electric power transfer prep - see page CH22
- US32 (629) polished finish
- Welded tips for non-rising pins

HALF MORTISE (EDGE MOUNT)

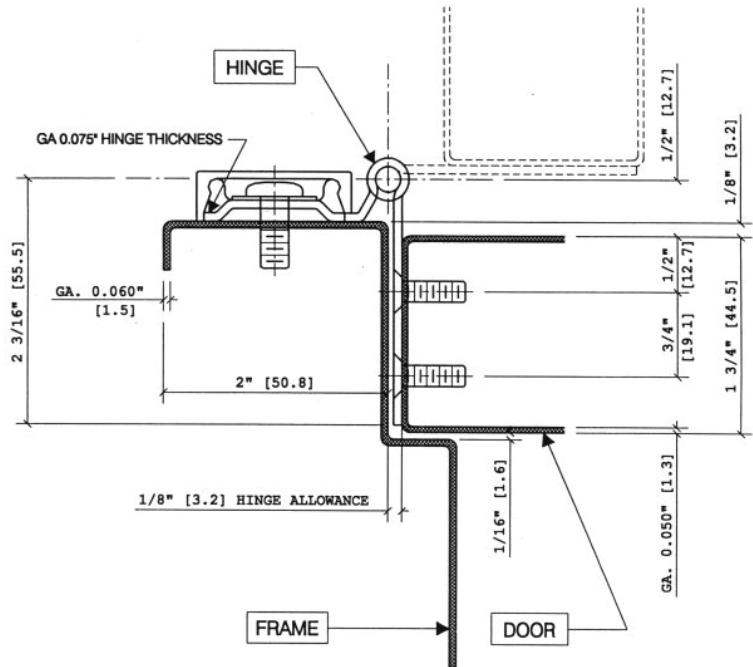

Fire-rated 3 hours on hollow metal doors and 90 minute on wood doors. Maximum size 4'0" x 10'0".



ANSI/BHMA certified to A156.26 American National Standard for Continuous Hinges:
Grade 1 - 150 lb. door