

# STAINLESS STEEL CONTINUOUS HINGE

## ELECTRIC

### ELECTRIC THRU-WIRE

## ETW8

Transfers electric power through the hinge to power certain types of electronic builders hardware.


Removable Electric Hinge Section

- ▶ 8 wires, 26 AWG
- ▶ Each wire is rated 24V AC/DC at 0.5A (max.) continuous or pulse
- ▶ 12" wire leads
- ▶ 5-year warranty

#### Available on Models:

SS300  
SS305 (Handed)  
SS315 (Handed)

**Standard Location, All Sizes: 39 5/8" Centerline from Bottom of Hinge.**

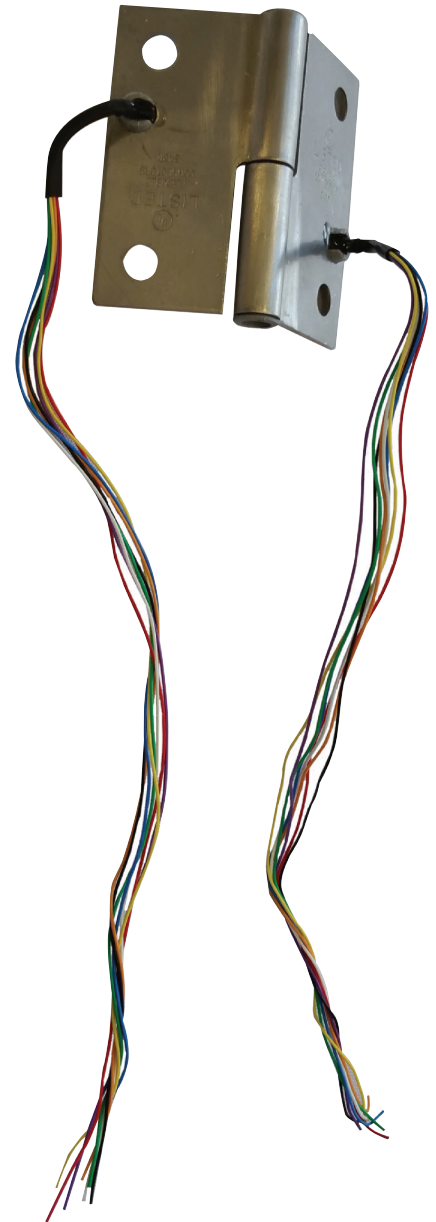

### ELECTRIC POWER TRANSFER PREP

## EPT PREP

Allows use of electric power transfer units required to power certain types of electronic builders hardware.

- ▶ Prep available for the following electric power transfer units
  - ▶ Von Duprin EPT-2, EPT-10, EPT-10C, PNT-1
  - ▶ Adams Rite 4612 (short version only)
  - ▶ Securitron EPT, EPT-SC, EL-EPT, EL-EPT-SC
  - ▶ Dorma ES105

**Available on All Concealed and Half Surface Type Hinges.**

#### Non-Handed Models:

SS300

#### Handed Models - Specify Door Hand

SS304, SS305, SS306, SS315

#### Standard Locations:

HINGE LENGTH	TOP OF HINGE TO CENTERLINE OF PREP
83"	28 7/16"
85"	30 7/16"
95"	40 1/2"
119"	64 3/8"