

# NGP-EDGE® SEALING SYSTEM

## CATEGORY G CLASSIFIED

NGP Intumescent materials are formulated to expand at 375°F to 400°F up to 8-10 times their original thickness; completely sealing the gap around and between doors during a fire.

### INTUMESCENT FIRE SEAL

#### Perimeter Application:



#### 20, 45, 60, 90 Minute Rated Category B Wood Doors Up To:



Single Swing 4'0 X 9'0  
Pairs 8'0 X 9'0

#### Meeting Edge Application Up To 8'0 X 9'0 Pairs of Category B Wood Doors:



20 Minute Rated with Single Strip Installed



45, 60 Minute Rated with Two Strips Installed

Intumescent With Protective Skin  
Available in 17', 21' and 150' Rolls

Self-Adhesive: See Adhesive Specifications on Page G15



<b>9800B</b>	Brown
<b>9800C</b>	Charcoal

### NGP-EDGE® INTUMESCENT FIRE SEAL

#### 20, 45, 60, 90 Minute Rated Category B Wood Doors Up To:



Single Swing 4'0 X 9'0, Perimeter Application  
Pairs 8'0 X 9'0, Perimeter/Meeting Edge

Intumescent With PVC Cover


Available in 36", 48", 84", 96" and 108" Lengths

Self-Adhesive: See Adhesive Specifications on Page G15

U.S. Pat. DES 417,739



<b>9500</b>	Gray
<b>9500DKB</b>	Brown

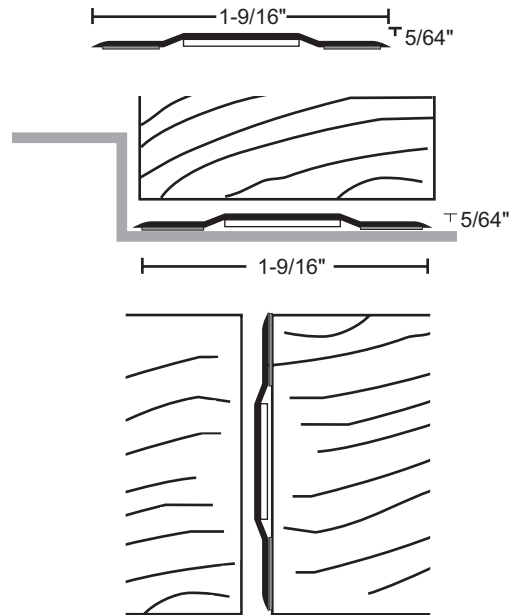

1/8" Clearance Required Between Doors and Between Door and Frame