

# NGP-EDGE® SEALING SYSTEM

CATEGORY G AND H CLASSIFIED SMOKE & DRAFT CONTROL

## INTUMESCENT WITH TPE FIN FIRE AND SMOKE SEAL



**20, 45, 60, 90 Minute Rated Category B Wood Doors Perimeter**

**Application Up To:**

Single Swing 4'0 X 9'0  
 Standard Pair 8'0 X 9'0 Use 9550 at the Meeting Edge

1/8" Clearance Required Between Door and Frame

Available in 36", 48", 84", 96" and 108" Lengths



Self-Adhesive: See Adhesive Specifications on Page G15



<b>9450B</b>	Brown
<b>9450C</b>	Charcoal



**Pictured:**  
**9450B**  
(Brown)

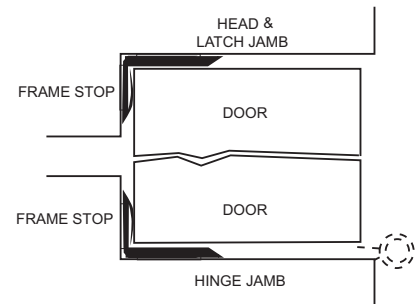

## NGP-EDGE® INTUMESCENT WITH TPE FINS FIRE AND SMOKE SEAL



**20, 45, 60, 90 Minute Rated Category B Wood Doors Up To:**

Single Swing 4'0 X 9'0, Perimeter Application  
 Pairs 8'0 X 9'0, Perimeter/Meeting Edge


1/8" Clearance Required Between Doors and Between Door and Frame

Available in 36", 48", 84", 96" and 108" Lengths

Self-Adhesive: See Adhesive Specifications on Page G15



<b>9550</b>	Gray
<b>9550DKB</b>	Brown



**Pictured:**  
**9550**  
(Gray)

