



# FLDL-SG2-316SS

Stainless Steel Fire-Rated Fusible Link Louver

## PRODUCT CUT SHEET

**Anemostat**  
DOOR PRODUCTS

PROJECT:
SUBMITTED BY:
DATE:
NOTES:


### For 1 3/4" Thick Doors Up To 90 Minutes

- ▶ Blades Close When Activated By Fire/Heat
- ▶ 18 Ga. Type 316 Stainless Steel Adjustable "Z" Blades
- ▶ 12 Ga. Type 316 Stainless Steel Security Grille Both Sides
- ▶ Stainless Steel Spring
- ▶ 165° Fusible Link
- ▶ #8 x 1" Torx Security Pin Screws
- ▶ Free Area 40%
- ▶ Available Sizes:


12" x 12"	18" x 12"	24" x 12"
12" x 18"	18" x 18"	24" x 18"
12" x 24"	18" x 24"	24" x 24"

### Windstorm Rated

- ▶ Louver for Use in Windstorm-Rated Assembly in Accordance with ANSI/ASTM E330, ANSI/ASTM E1886, ASTM E1996, AAMA/WDMA/CSA 101/I.S.2/A440, FEMA 320, FEMA 361 and ICC 500.  
Design Pressure = +/- 70 PSF  
Large Missile Impact = 350 ft. lbs.  
Hazard - Hurricane
- ▶ Maximum Size for Hurricane Use is 24" x 24" (610mm x 610mm)

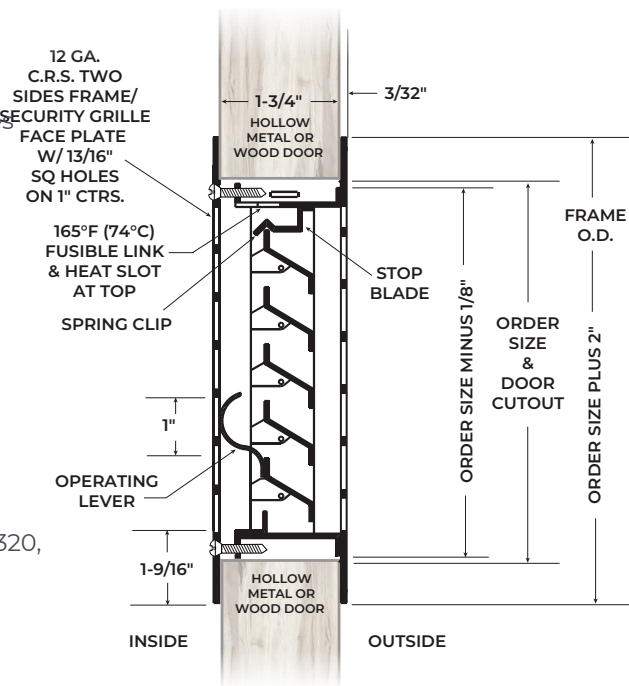

Not To Scale

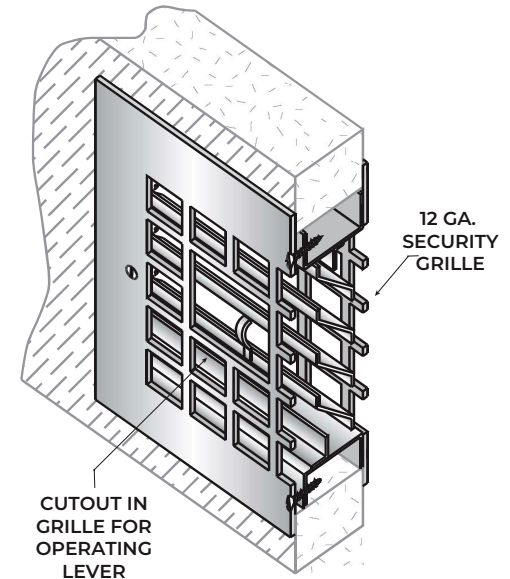

\*Up to 90 Minutes

NGP-LIT-FLDL-SG2-316SS-PCS-0225-A

## NATIONAL GUARD PRODUCTS, INC.

### MEMPHIS

4985 East Raines Road  
Memphis, TN 38118

### CARSON CITY

3689 Arrowhead Drive  
Carson City, NV 89706

Fax: (800) 255-7874  
Email: info@ngp.com

Quotes: quotes@ngp.com  
Orders: orders@ngp.com

**ngp.com**  
1-800-NGP-RUSH