

FLDL-SG2

STORM PRO™ FIRE-RATED FUSIBLE LINK LOUVER



FOR 1 3/4" THICK DOORS UP TO 90 MINUTES



- Blades Close When Activated By Fire/Heat
- 18 Ga. Cold Rolled Steel Adjustable "Z" Blades
- 12 Ga. Cold Rolled Steel Security Grille Both Sides
- Stainless Steel Spring
- 165° Fusible Link
- #8 x 1" Torx Security Pin Screws
- Free Area 40%
- Gray Primer (GPZ) Powder Coat Finish
- Available in Whole Inch Increments:
Minimum size: 10" x 6"
Maximum size: 24" x 30"

Available Options

- Powder Coat Color Options - See Page L3
- Aluminum Insect Screen - 22 Ga. 1/8" Square Mesh Installed on Exterior Side
- Galvanneal - A40 Blades (Security Grilles Not Available in Galvanneal)
- Type 316 Stainless Steel – Specify FLDL-SG2-316SS,
Stock Sizes:
12" x 12" 18" x 12" 18" x 18"
24" x 12" 24" x 18" 24" x 24"

Windstorm Rated

- Louver for Use in Windstorm-Rated Assembly in Accordance with ANSI/ASTM E330, ANSI/ASTM E1886, ASTM E1996, AAMA/WDMA/CSA 101/I.S.2/A440, FEMA 320, FEMA 361 and ICC 500.
Design Pressure = +/- 70 PSF
Large Missile Impact = 350 ft. lbs.
Hazard - Hurricane
- Maximum Size for Hurricane Use is 24" x 24" (610mm x 610mm)

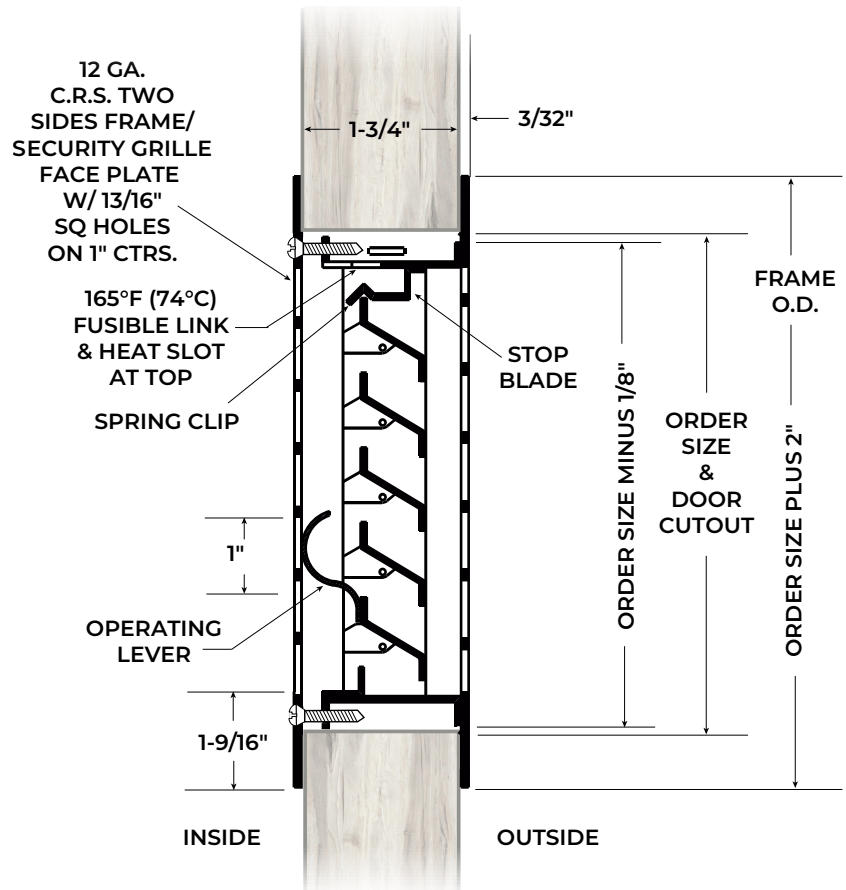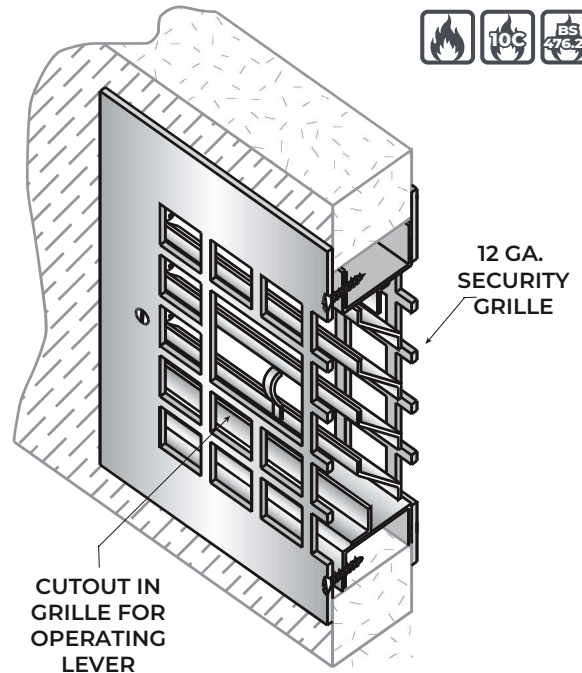

Not To Scale