


Tempered Glass

- Impact safety-rated: complies with IBC requirements for use in doors. Meets ANSI Z97.1 Class A and CPSC 16CFR 1201 (CAT I and II)
- 1/4" thick clear heat treated glass
- Approximately 4 times stronger than annealed (ordinary) glass
- Breaks into small harmless fragments
- Can NOT be cut after manufacturing
- 11" minimum height
- Manufactured in USA
- NOT fire-rated
- STC 31 rating

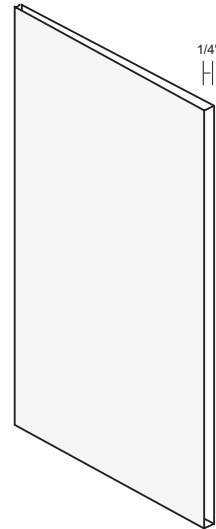

Insulated Tempered Glass

- Impact safety-rated: complies with IBC requirements for use in doors. Meets ANSI Z97.1 Class A and CPSC 16CFR 1201 (CAT I and II)
- 1" thick - consists of two pieces of 1/4" thick clear tempered glass with 1/2" air space between and butyl seal
- Increased energy efficiency
- Approximately 4 times stronger than annealed (ordinary) glass
- Breaks into small harmless fragments
- Can NOT be cut after manufacturing
- Manufactured in USA
- 5 year manufacturer Warranty
- NOT fire-rated
- STC 35 rating

