



# HD1100, HD1100-LL

Concealed Continuous Geared Hinge

## PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

### No Door Inset, Flush Mount for 1 3/4" Doors

- ▶ Aluminum Alloy 6063-T6; Anodized After Machining
- ▶ Specially Designed Involute Intermeshing Gears
- ▶ Proprietary Teflon Infused Self-Lubricating Wear-Resistant Bearings
- ▶ No Hinge Reinforcement Necessary Except on Extremely Heavy, Extremely High-Frequency or Extra-Wide Doors
- ▶ Lifetime of the Door Opening Warranty
- ▶ #12-24 TEK MS
- ▶ "LL" Model for Doors up to 1,000 Lbs. Features Lead-Lined Dual Row Hole Pattern
- ▶ Standard Lengths: 83", 85", 95", 119"

#### Options:

- ▶ #12 x 1 1/2" Wood Screws
- ▶ Torx Security TEK Screws
- ▶ 1 1/2" Torx Security Wood Screws
- ▶ Cut to Net Length
- ▶ Anti-Ligature Hospital Tip - Specify "ALHT"
- ▶ Dutch Door Prep - Order Form Available at [ngp.com](http://ngp.com)
- ▶ ETW-8 Electric Thru Wire
- ▶ ETW-8-MOLEX Electric Thru Wire with Molex Connectors
- ▶ EPT Prep - Order Form Available at [ngp.com](http://ngp.com)

#### Finishes:


- A - Anodized Aluminum
- DKB - Dark Bronze Anodized



Fire-rated 90 minute on hollow metal (except steel stiffened) or wood door leaves up to 4'0" x 8'0" and steel stiffened doors up to 4'0" x 7'2".



ANSI/BHMA Certified to A156.26 American National Standard for Continuous Hinges: Grade 1 - 600 lb. Door

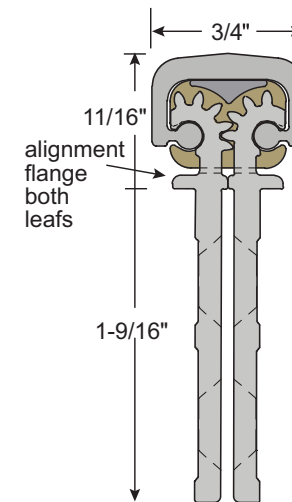

Note: For Door Sizing Refer to Installation Instruction.

NGP-CHG-HD1100-PCS-1224-A

### NATIONAL GUARD PRODUCTS, INC.

#### MEMPHIS

4985 East Raines Road  
Memphis, TN 38118

#### CARSON CITY

3689 Arrowhead Drive  
Carson City, NV 89706

Fax: (800) 255-7874

Email: [info@ngp.com](mailto:info@ngp.com)

Quotes: [quotes@ngp.com](mailto:quotes@ngp.com)

Orders: [orders@ngp.com](mailto:orders@ngp.com)

[ngp.com](http://ngp.com)  
1-800-NGP-RUSH