



HP90-CYL

Cylindrical Hardware Prep Filler

PRODUCT CUT SHEET

UL Certified Solution for Fire Doors When Either Removing Existing Hardware and/or Using a New Hardware Type Over Existing Hardware Prep's.



- Application Certified on Both Hollow Metal and Wood Fire-Rated Doors – up to 90-Minute
- Patent Pending
- Certified for Filling Cylindrical Lockset Cavities

PRODUCT CONSISTS OF:

- + Fire-Rated Panels: HP90 – 2.0, HP90 – 1.0, HP90 – 0.5
- + Steel Filler Plates: *(Powder Coated Primer Gray, Embossed With UL Mark)*
 - HP90-RDCP, Filler Plate
 - HP90-CEF1000, Edge Filler Plate
 - HP90-SF2750, Strike Filler Plate
 - HP90-SF4875, Strike Filler Plate
- + Hardware Pack:
 - #10-32 x 1 3/4" FHPH SS Machine Screw
 - #8 x 3/4" FHPH SS Combo Screw
 - #12 x 1" FHPH SS Combo Screw
 - #8 x 3/4" FHPH SS SMS
 - #12 x 1" FHPH SS SMS
- + GapGuard™ Fire Caulk *(see Installation Instructions)*
- Sizes: Cylindrical Lockset Hardware Prep

FINISH:

Primer Gray, Powder Coat


PROJECT:
SUBMITTED BY:
DATE:
NOTES:

WOOD DOOR: INSTALLED VIEW



■ GapGuard™ Fire Caulk Fill

STEEL DOOR: INSTALLED VIEW

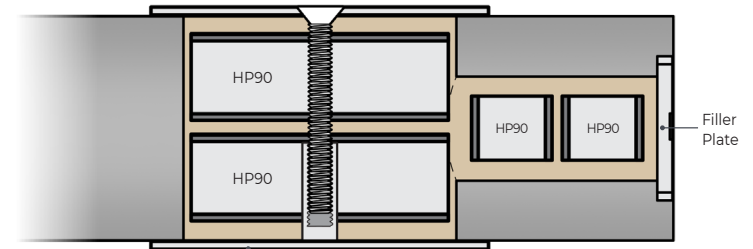

■ GapGuard™ Fire Caulk Fill



SPECIAL NOTES:

- 90-minute rated UL Certified Miscellaneous Fire Door Accessory on UL10B and UL10C wood or hollow metal fire doors
- To retain UL Certification, the HP90-CYL must be installed using GapGuard™ Fire Caulk

NGP-GAP-HP90-CYL-PCS-0621-A

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

ngp.com
1-800-NGP-RUSH