

HP90-MORT

MORTISE HARDWARE PREP FILLER



UL CERTIFIED FOR USE IN
THE US AND CANADA

**UL Certified Solution for Fire Doors When
Either Removing Existing Hardware and/or
Using a New Hardware Type Over Existing
Hardware Prep's.**

PRODUCT INFORMATION

- ▶ Application Certified on Both Hollow Metal and Wood Fire-Rated Doors – up to 90-Minute
- ▶ Patent Pending
- ▶ Certified for Filling Mortise Lockset Cavities

PRODUCT CONSISTS OF:

- + HP90 – 4" x 6" Fire-Rated Panel
- + Steel Filler Plates: *(Powder Coated Primer Gray, Embossed With UL Mark)*
 - HP90-MEF1258, Edge Filler Plate
 - HP90-SF4875, Strike Filler Plate
- + Hardware Pack
 - #10-32 x 1-3/4" FHPH SS machine screw
 - #8 x 3/4" FHPH SS combo screw
 - #12 x 1" FHPH SS combo screw
 - #8 x 3/4" FHPH SS SMS
 - #12 x 1" FHPH SS SMS
- + GapGuard™ Fire Caulk
(see Installation Instructions)




POSITIVE PRESSURE TESTED
MISCELLANEOUS FIRE DOOR
ACCESSORY



SPECIAL NOTES:

· 90-Minute Rated UL Certified
Miscellaneous Fire Door Accessory
on UL10B and UL10C Wood or Hollow
Metal Fire Doors

· To Retain UL Certification, the HP90-MORT must
be installed using GapGuard™ Fire Caulk

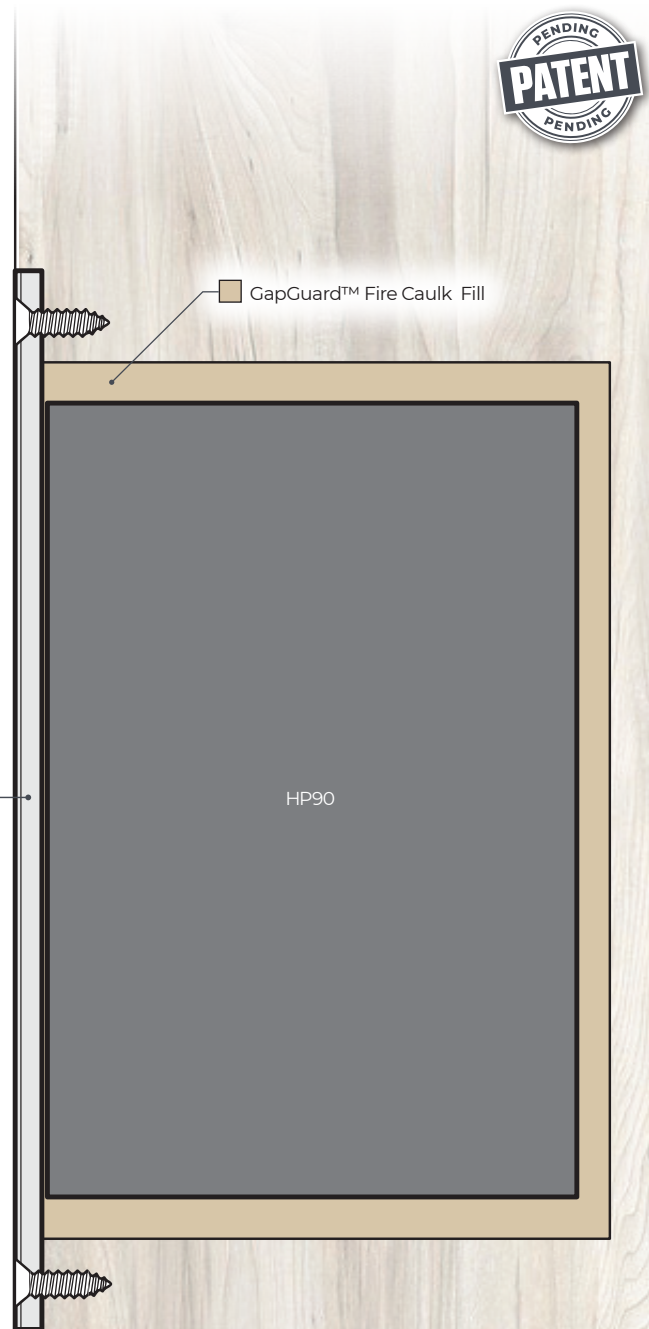

**WOOD DOOR
INSTALLATION
SHOWN**