

# DOOR EDGES AND ASTRAGALS




NGP Order Form (Page EA10) Indicating Model Number, Hand, Net Length, Hardware Preps, and Precise Hardware Locations Must Accompany All Orders.

- ▶ 20 Ga. Cold Rolled Steel on Edges
- ▶ 18 Ga. Cold Rolled Steel on Astragal Welded to Edges
- ▶ For 1 3/4" Thick Doors (Inside Dim. 1 3/4" Actual)
- ▶ #8 x 3/4" Flat Undercut Phillips Head SMS
- ▶ Standard Finish = Tan (T) Powder Coat


## Available Options:

- ▶ Powder Coat Color Options - See Page EA2
- ▶ Stainless Steel 20 Ga., Type 304, #4 Brushed Finish - Suffix SS"
- ▶ Galvanneal
- ▶ Torx Security Screws
- ▶ Special Door Thickness: Available from 1 3/8" to 2 1/4"
- ▶ Lead Lining 1/16" Thick


## ASTRAGAL ON INACTIVE LEAF




**560** SINGLE ASTRAGAL SQUARE EDGE



**562** SINGLE ASTRAGAL BEVELED EDGE

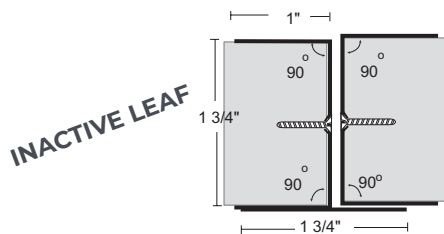

**561** ASTRAGAL SET SQUARE EDGE

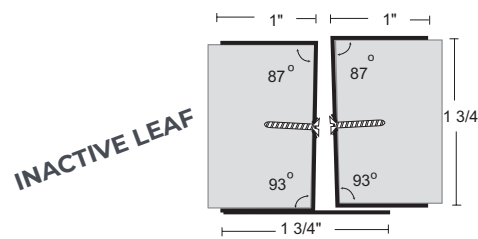

**563** ASTRAGAL SET BEVELED EDGE

Astragals Mounted on Active Leaf that are Prepped for a Lockset Will Be Notched for the Strike Lip, Unless Specified Otherwise.