



# Fire-rated Fusible Link Louver for 1-3/4" Thick Doors up to 90 Minutes L-1900




### Materials & Finishes

- Blades close when activated by fire/heat
- 18 ga. cold rolled steel frame
- 18 ga. cold rolled steel adjustable "Z" blades
- Mitered corners secured with reinforcing clips
- Stainless Steel Spring
- 165° Fusible link
- Free area 40%
- #8 x 3/4" Phillips head SMS
- Gray Primer (GPZ) powder coat finish

### Available Options

- Powder coat color options - see color chart on [www.ngp.com](http://www.ngp.com)
- Aluminum insect screen - 22 ga. 1/8" square mesh installed on exterior side unless requested otherwise
- Torx Security screws
- Galvanneal A40 steel

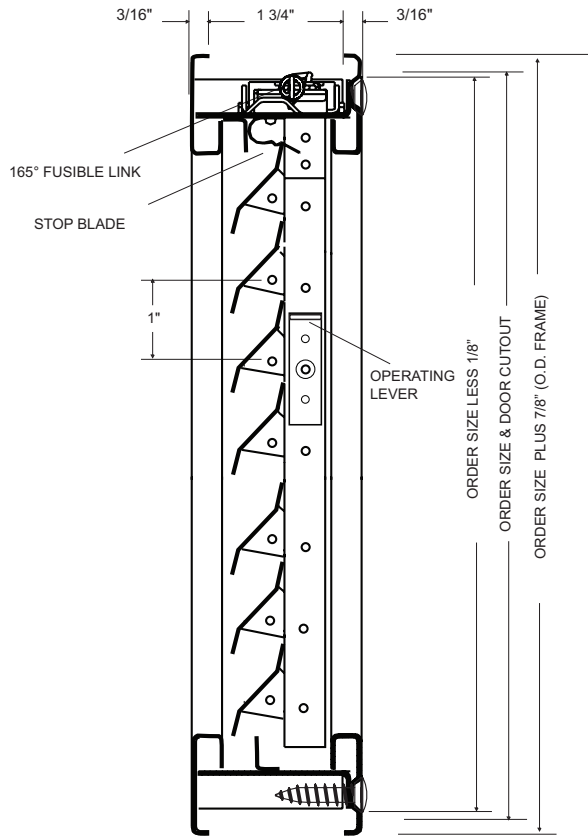

<b>Project:</b>
<b>Submitted by:</b>
<b>Date:</b>
<b>Notes:</b>