

## L-CVFM-SS-SP

### Stainless Steel Lite Kit for Variable Door and/or Glass Thickness



- 18 ga. Type 304 stainless steel
- Mitered and welded corners
- Welded reinforcing clips at corners
- Counter-sunk mounting screw-holes
- #8 Phillips head SMS
- Available in uneven and fractional sizes
- #4 satin finish

#### Required Information

- Specify glass thickness on order
- Specify door thickness on order if other than 1-3/4"

#### Available Options

- 18 ga. Type 316 stainless steel –  
Specify *L-CVFM-316SS-SP*
- Torx Security Screws
- Glass & Glazing tape - See Glass Section
- Lead lining - .030" thick

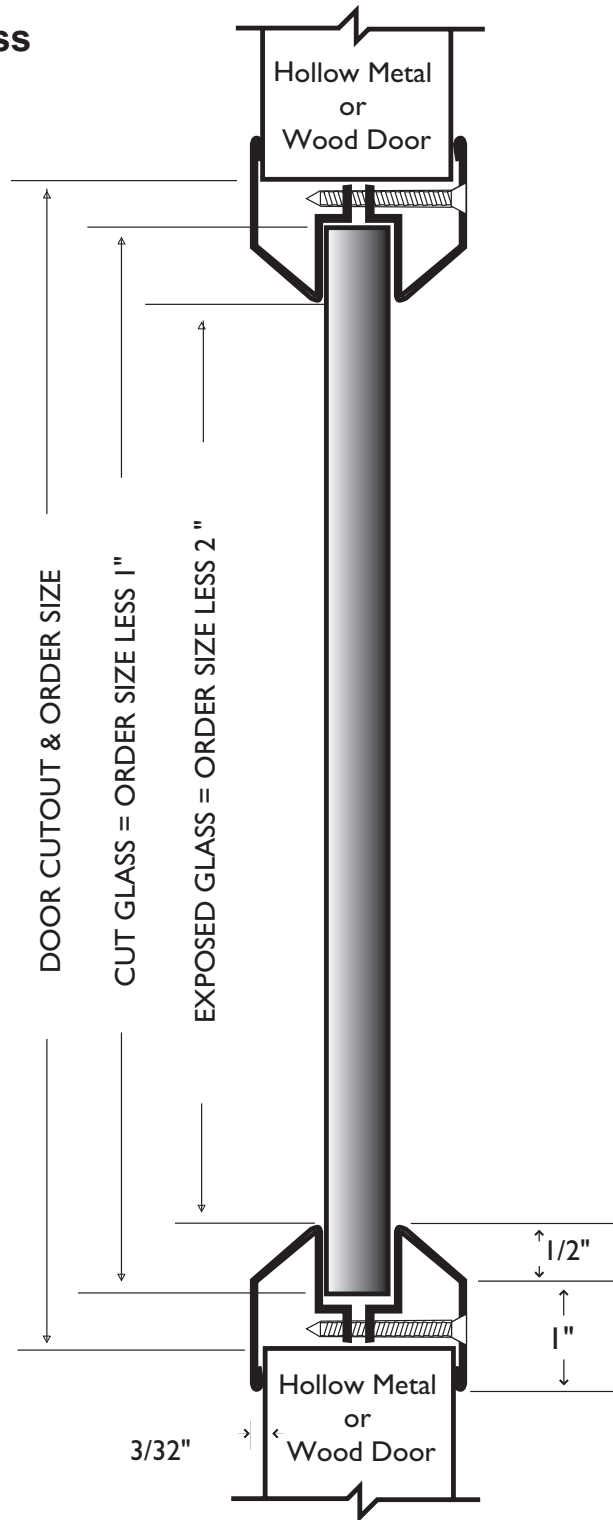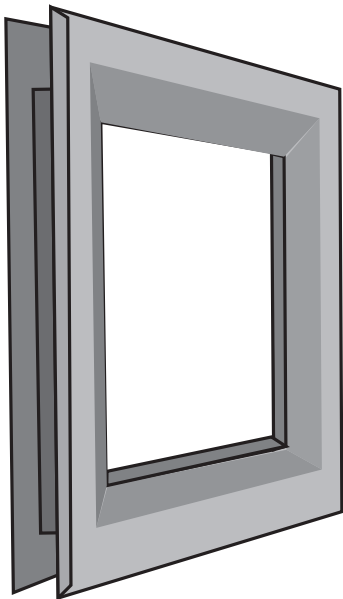

## L-CVFM-SS-SP Glass and Door Combinations

Details shown are for 1-3/4" door thickness.  
Only configurations shown are available  
Some applications require thicker glazing tape

