



# L-GLF100-SP-TB

## Thru-Bolted Lite Kit

### PRODUCT CUT SHEET

#### For 1 3/4" Thick Doors and Variable Glass Thickness 3/8" to 1 1/4"


- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Counter-Sunk Mounting Screw-Holes
- Thru-Bolts for 1 3/4" Door
- Gray Primer (GPZ) Powder Coat Finish

#### Required Information

- Specify Glass Thickness on Order

#### Available Options

- Powder Coat Color Options - See Color Chart on [www.ngp.com](http://www.ngp.com)
- False Mullion Bars
- Torx Security Thru-Bolts
- Galvanneal - A40 Steel
- Zinc Electro-Plating
- Glass & Glazing Tape
- Lead Lining - .030" Thick

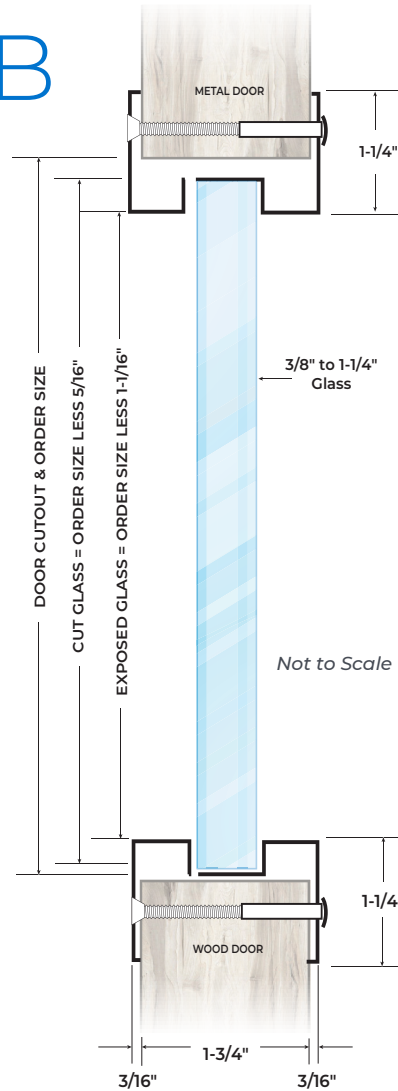

Door prep requires square cut corners

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

- Details Shown are for 1 3/4" Door Thickness
- Only Configurations Shown are Available
- Thru-Bolts Available for 1 3/4" Thick Doors Only

DOOR	GLASS	GL. TAPE
2"	1/4"	GT-114
2"	7/16"	GT-118
2"	1/2"	GT-118
1-3/4"	3/8"	GT-114
1-3/4"	1/2"	GT-316
1-3/4"	9/16"	GT-118
1-3/4"	5/8"	GT-118
1-3/8"	1/4"	GT-118
2"	7/8"	GT-118
2-1/4"	1"	GT-316
1-3/4"	3/4"	GT-118
1-3/4"	1"	GT-118
1"	1/4"	GT-118
1-3/4"	1-1/8"	GT-118
1-3/4"	1-1/4"	GT-118
1"	1/2"	GT-118

Designed for Use on 1 3/4" Thick Doors Manufactured Within Door Industry Tolerance of +/- 1/16"

NGP-LIT-L-GLF100-SP-TB-PCS-0822-A