

# L-GLF100-TB

## THRU-BOLTED LITE KIT

### FOR 1 3/4" THICK DOORS AND 3/16", 1/4", OR 5/16" GLASS



- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Countersunk Mounting Screw-Holes
- Thru-Bolts for 1 3/4" Door
- Gray Primer (GPZ) Powder Coat Finish

#### Available Options

- Powder Coat Color Options - See Page L3
- False Mullion Bars - See Page L13
- Torx Security Thru-Bolts
- Galvanneal - A40 Steel
- Zinc Electroplating
- Glass & Glazing Tape - See Glass Section
- Lead Lining - 1/16" Thick

# L-GLF100-SP-TB

## THRU-BOLTED LITE KIT

### FOR 1 3/4" THICK DOORS AND VARIABLE GLASS THICKNESS 3/8" TO 1 1/4"


- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Countersunk Mounting Screw-Holes
- Thru-Bolts for 1 3/4" Door
- Gray Primer (GPZ) Powder Coat Finish

#### Required Information

- Specify Glass Thickness

#### Available Options

- Powder Coat Color Options - See Page L3
- False Mullion Bars - See Page L13
- Torx Security Thru-Bolts
- Galvanneal - A40 Steel
- Zinc Electroplating
- Glass & Glazing Tape - See Glass Section
- Lead Lining - 1/16" Thick

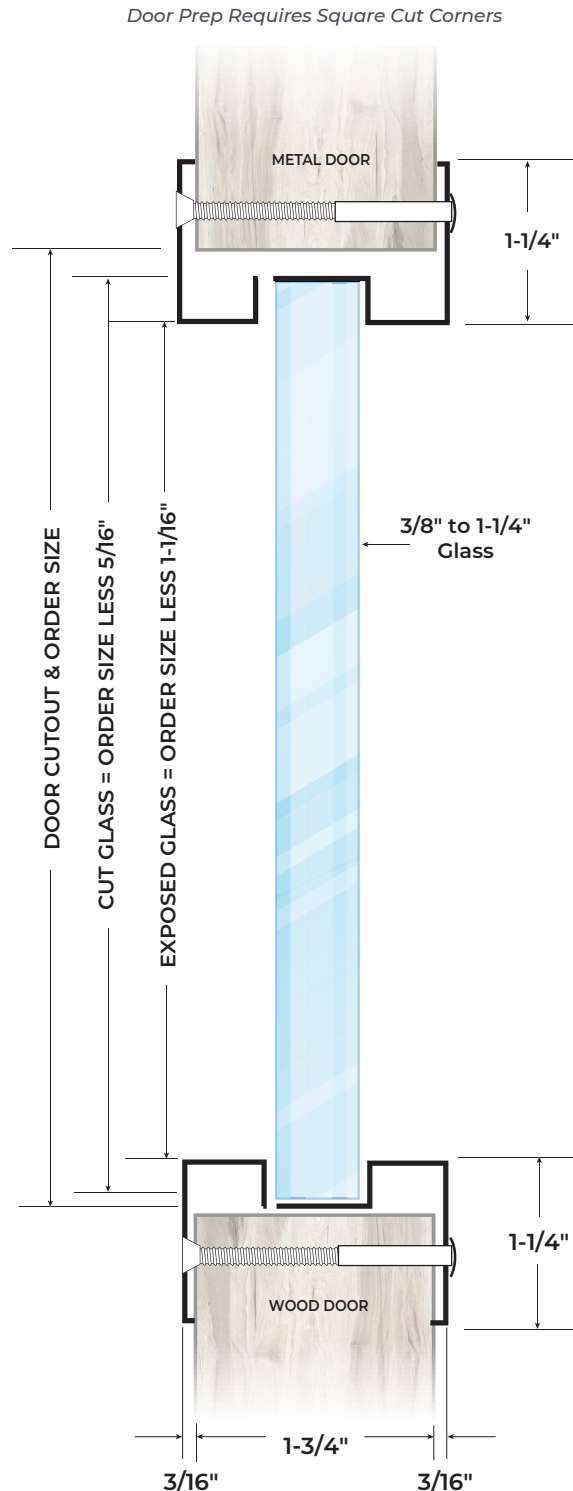

Not To Scale

Designed for Use on 1 3/4" Thick Doors Manufactured Within Door Industry Tolerance of +/- 1/16"