

L-SG100-TB

Thru-Bolted Security Grille Lite Kit for 1-3/4" Thick Doors and Variable Glass Thickness

- 18 ga. cold rolled steel
- 16 ga. steel 3/4" x 3/4" security grille welded in both sides
- Mitered and welded corners
- Welded reinforcing clips at corners
- Countersunk mounting screw-holes
- Thru-bolts for 1-3/4" door
- Gray Primer (GPZ) powder coat finish

Required Information;



- Specify glass thickness on order
 (See page L15 for available sizes)

Available Options

- Powder coat color options - see page L2
- False mullion bars (Page L9)
- Torx security Thru-bolts
- Galvanneal - A40 Steel
- Zinc electro-plating
- Glass & Glazing tape - See Glass Section
- Lead lining - .030" thick



*up to 90 minutes.

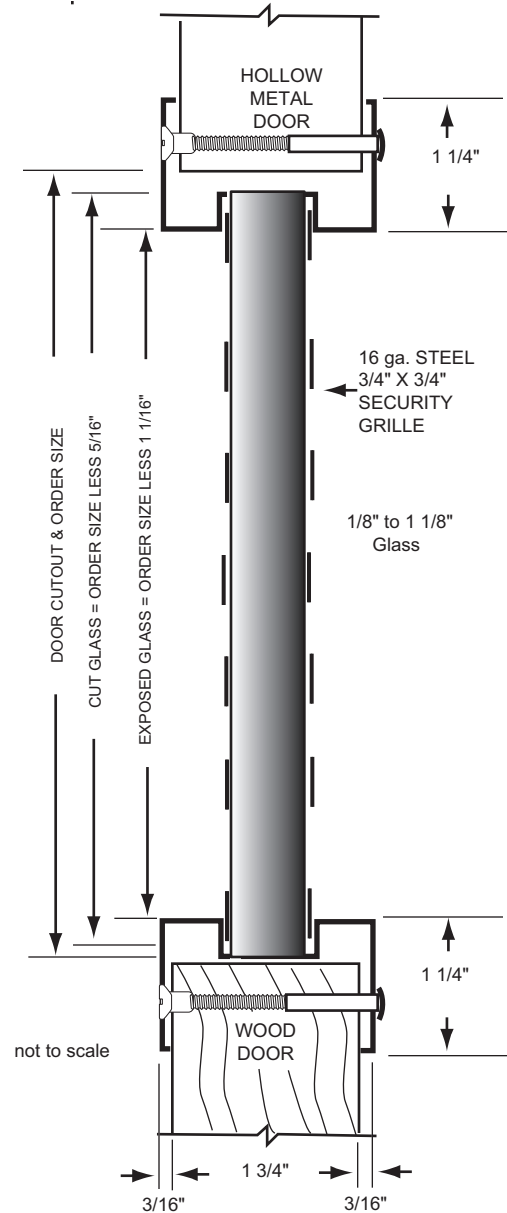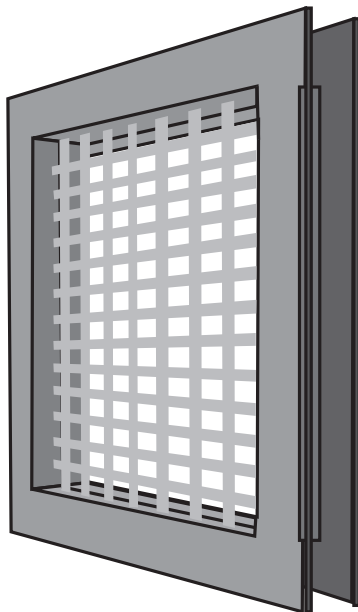

L-SG100 and L-SG100-TB Glass and Door Combinations

Details shown are for 1-3/4" door thickness
 Only Configurations shown are available
 Some applications require thicker glazing tape
 Thru-bolts available for 1-3/4" thick doors only

