

L-FRA100-SP

Low Profile Lite Kit for Variable Door and/or Glass Thickness


- 18 ga. cold rolled steel
- Mitered and welded corners
- Welded reinforcing clips at corners
- Counter-sunk mounting screw-holes
- #8 Phillips head SMS
- Available in uneven and fractional sizes
- Gray Primer (GPZ) powder coat finish

Required Information

- Specify glass thickness on order
- Specify door thickness on order if other than 1-3/4"

Available Options

- Powder coat color options - see page L2
- Torx Security Screws
- Galvanneal - A40 Steel
- Zinc electro-plating
- Glass & Glazing tape - See Glass Section
- Lead lining - .030" thick

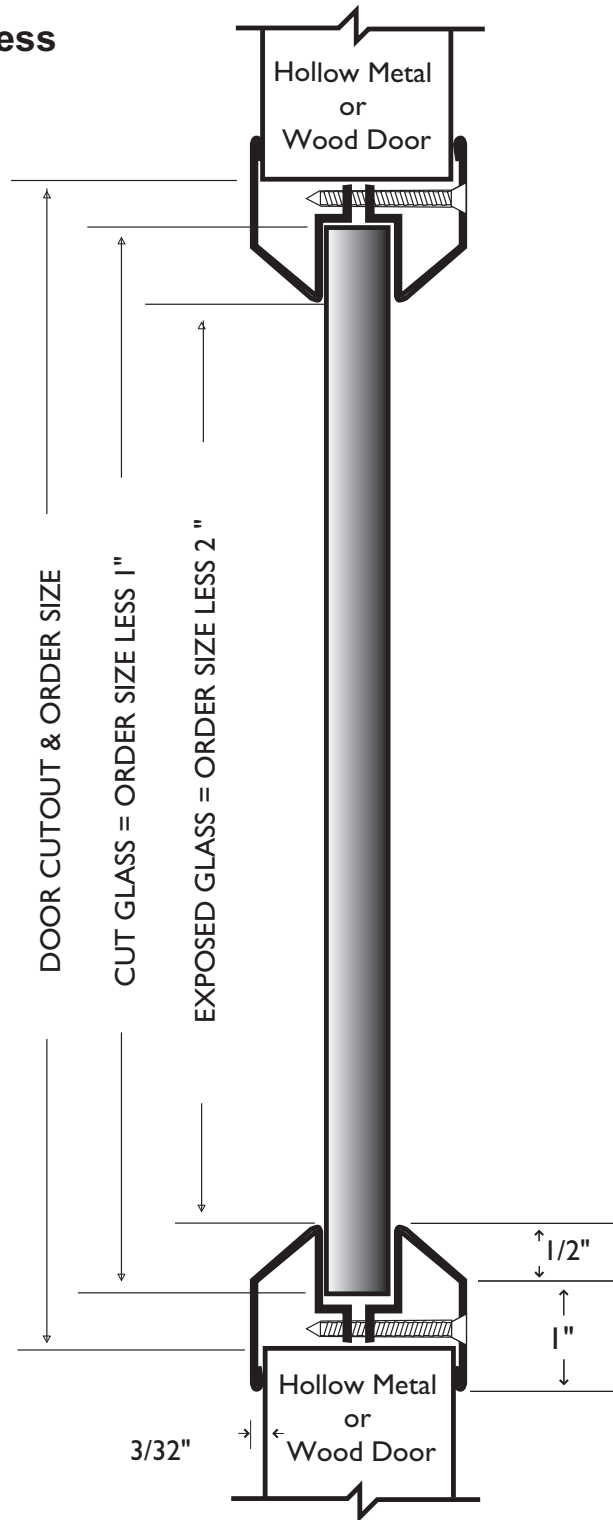

L-FRA100-SP Glass and Door Combinations

Details shown are for 1-3/4" door thickness.
 Only configurations shown are available
 Some applications require thicker glazing tape

