

L-GLF100-SP

Square Profile Lite Kit for Variable Door and/or Glass Thickness



- 18 ga. cold rolled steel
- Mitered and welded corners
- Welded reinforcing clips at corners
- Countersunk mounting screw-holes
- #6 Phillips Truss Head SMS
- Gray Primer (GPZ) powder coat finish

Required Information

- Specify glass thickness on order
- Specify door thickness on order if other than 1-3/4"

Available Options

- Powder coat color options - see page L2
- False mullion bars (Page L9)
- Torx Security Screws
- Galvanneal - A40 Steel
- Zinc electro-plating
- Glass & Glazing tape - See Glass Section
- Lead lining - .030" thick lead

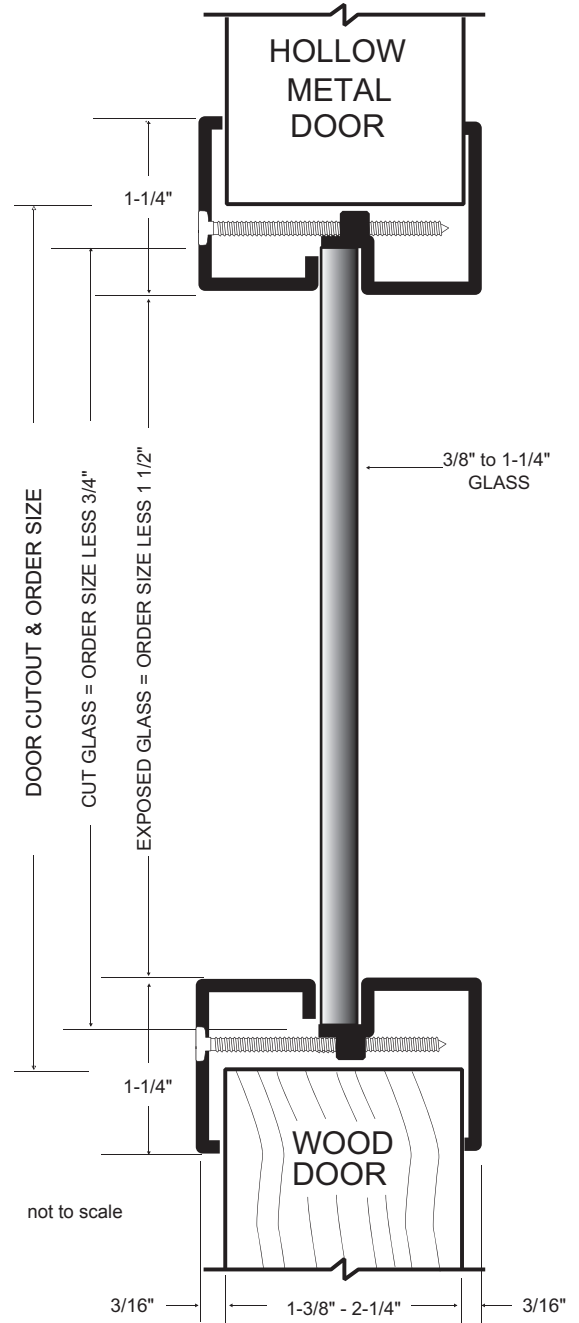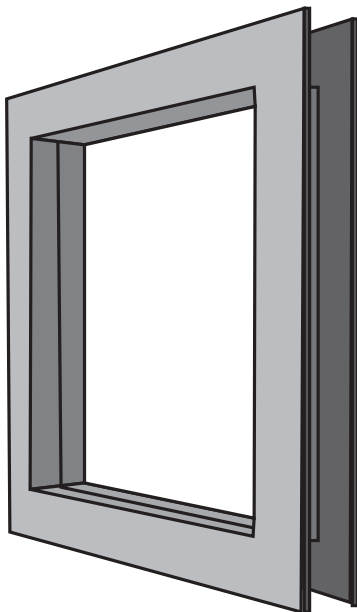

L-GLF100-SP and L-GLF100-SP-TB Glass and Door Combinations

Details shown are for 1-3/4" door thickness
 Only Configurations shown are available
 Some applications require thicker glazing tape
 Thru-bolts available for 1-3/4" thick doors only

