

## L-GLF100-TB

### Thru-bolted Lite Kit for 1-3/4" Thick Doors and 3/16", 1/4", or 5/16" Glass

- 18 ga. cold rolled steel
- Mitered and welded corners
- Welded reinforcing clips at corners
- Countersunk mounting screw-holes
- Thru-bolts for 1-3/4" door
- Gray Primer (GPZ) powder coat finish

#### Available Options

- Powder coat color options - see page L2
- False Mullion bars (Page L9)
- Torx Security Thru-bolts
- Galvanneal - A40 Steel
- Zinc electro-plating
- Glass & Glazing tape - See Glass Section
- Lead lining - .030" thick



## L-GLF100-SP-TB


### Thru-bolted Lite Kit for 1-3/4" Thick Doors and Variable Glass Thickness 3/8" to 1-1/4"

- 18 ga. cold rolled steel
- Mitered and welded corners
- Welded reinforcing clips at corners
- Countersunk mounting screw-holes
- Thru-bolts for 1-3/4" door
- Gray Primer (GPZ) Powder coat finish

**Required Information:** Specify Glass thickness

#### Available Options

- Powder coat color options - see page L2
- False Mullion bars (Page L9)
- Torx Security Thru-bolts
- Galvanneal - A40 steel
- Zinc electro-plating
- Glass & Glazing tape - See Glass Section
- Lead lining - .030" thick

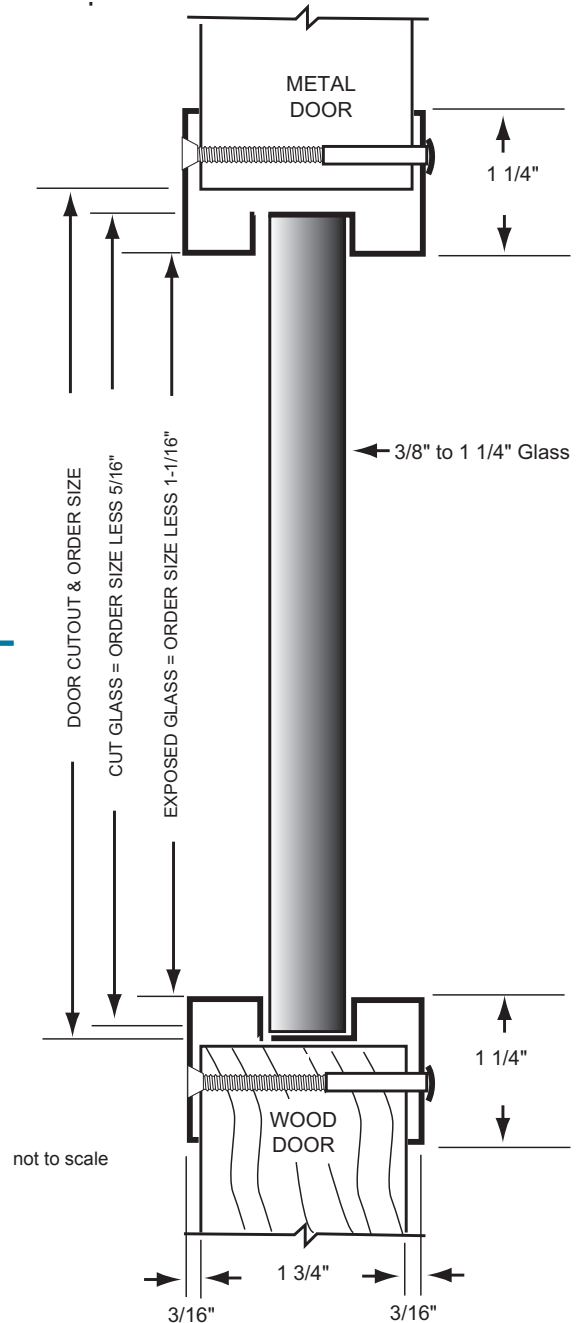

Designed for 1-3/4" thick Doors manufactured within door industry tolerance of +/- 1/16"

# L-GLF100-SP and L-GLF100-SP-TB Glass and Door Combinations

Details shown are for 1-3/4" door thickness  
 Only Configurations shown are available  
 Some applications require thicker glazing tape  
 Thru-bolts available for 1-3/4" thick doors only

