

## L-SG100

### Self Attaching Security Grille Lite Kit for Variable Door and/or Glass Thickness

- 18 ga. cold rolled steel
- 16 ga. steel 3/4" x 3/4" security grille welded in both sides
- Mitered and welded corners
- Welded reinforcing clips at corners
- Countersunk mounting screw-holes
- #6 Phillips truss head screws
- Gray Primer (GPZ) powder coat finish

#### Required Information



- Specify glass thickness on order
- Specify door thickness on order if other than 1-3/4" (See page L15 for available sizes)

#### Available Options

- Powder coat color options - see page L2
- False mullion bars (Page L9)
- Torx security screws
- Galvanneal - A40 Steel
- Zinc electro-plating
- Glass & glazing tape - See Glass Section
- Lead lining - .030" thick



\*up to 90 minutes.

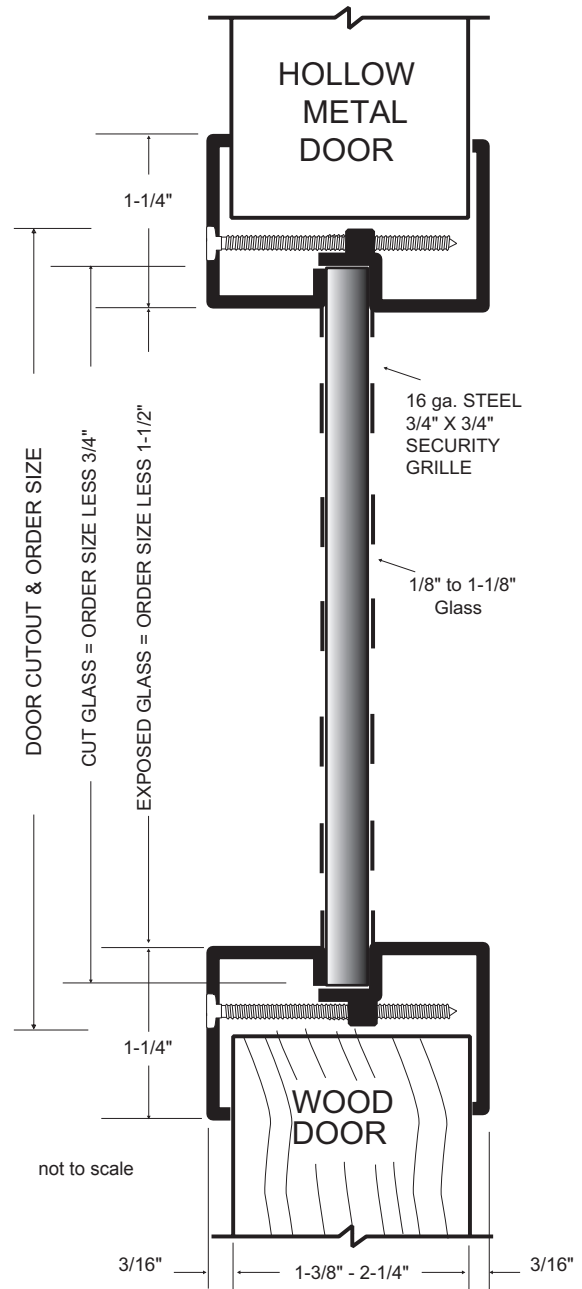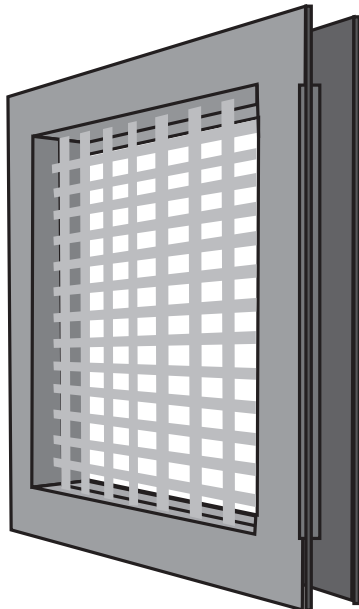

# L-SG100 and L-SG100-TB Glass and Door Combinations

Details shown are for 1-3/4" door thickness  
 Only Configurations shown are available  
 Some applications require thicker glazing tape  
 Thru-bolts available for 1-3/4" thick doors only

