

NEOPRENE BULB SEALS

All Neoprene Seals This Section:



- ▶ Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix
- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -81°F to 275°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- ▶ Screw Holes Slotted for Adjustment


137NA

Anodized Aluminum
Neoprene Bulb
Perimeter Seal




PRODUCT#	SUFFIX	FINISH
	A	Anodized Aluminum
	DKB	Dark Bronze
	None	Mill Aluminum


*Neoprene is Black
Polyurethane is Black*




**135N
135NA
135NDKB**



**131NA
131NDKB
134NA
134NDKB
137NA
137NDKB**



**161NA
161NDKB**
.07 Aluminum for Military Specs




**172NA
172NDKB**

POLYURETHANE SEALS


All Polyurethane Seals this Section:




- ▶ Very Good Abrasion Resistance, Tensile Strength, Memory and UV Resistance
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -80°F to 200°F
- ▶ #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- ▶ Screw Holes Slotted for Adjustment



**150UA
150UDKB**

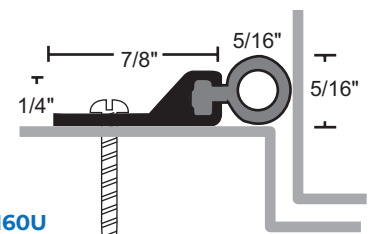

**160U
160UA
160UDKB**



**161UA
161UDKB**

.07 Aluminum for Military Specs