



Pyran[®] Platinum F

Fire Protective Ceramic Safety Glass

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material


- ▶ 3/16" (5mm) Thick Glass Ceramic
- ▶ Heavy-Duty 7 Mil Durable Safety Film
- ▶ Neutral Coloration - Clear and Wireless
- ▶ Advanced Manufacturing Process Eliminates the Need for Surface Polishing
- ▶ Etched with UL Classification on Each Piece
- ▶ 5-year Manufacturer Warranty
- ▶ Weight: 2.5 Lbs./Sq. Ft.
- ▶ STC 31 Rating

Fire-Rating Information:

- ▶ Certified by UL to ANSI/UL 9, ANSI/UL10B, ANSI/UL10C, CAN/ULC-S104, ULC CAN4-S106 with Closed Cell PVC Foam Glazing Tape Like NGP L-GT-116, L-GT-118, L-GT-132
- ▶ IBC Applicable Edition May Limit Maximum Size Allowable

Impact Safety Rating Information:

Meets ANSI Z97.1, Class A
 Meets CPSC 16CFR 1201 (Category I and II)
 Complies with IBC Requirements for Use in Doors, Side-Lites, Transom Lites and Borrowed Lites

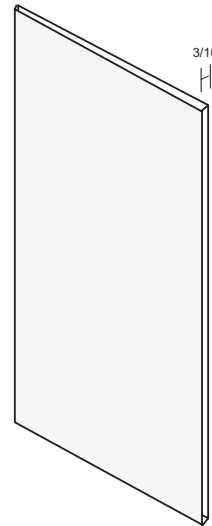

RATING	APPLICATION	MAX. VISIBLE GLASS AREA (SQ. INCHES)	MAX. WIDTH VISIBLE GLASS	MAX. HEIGHT VISIBLE GLASS
20, 45, 60, 90 MINUTE	DOORS* (NON-TEMP RISE)	3,708	37 3/4"	98 1/4"
20, 45, 60, 90 MINUTE	SIDE-LITES, BORROWED LITES, TRANSOM LITES	4,933	98 1/4"	98 1/4"
180 MINUTES	DOORS* INCLUDING TEMP-RISE	100	12"	33"

*with Fire-Rated Glass Lite Kit

NGP-GLA-PYRANF-PCS-0621-B