




R200

ADA Compliant Interlocking Ramp
24" Wide x 2" Tall

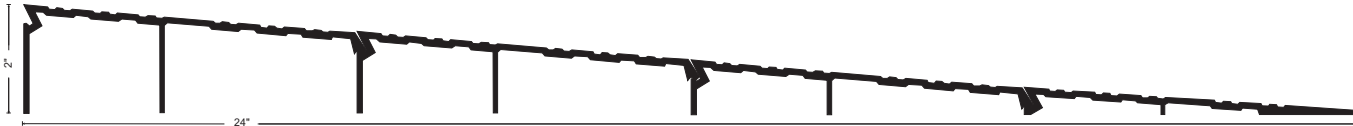

- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ Typical Wall Thickness: .110"
- ▶ 24" Wide x 2" Tall
- ▶ Weight: 5.58 Lbs./Ft.
- ▶ BHMA Certified to ANSI/BHMA A156.21
- ▶ #10 FH Zinc Plated Wood Screws Included
- ▶ 1,000 Lb. Load Test



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS, RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS, RATED UP TO 1½ HOURS. CATEGORY J



ngp.com
1-800-NGP-RUSH

FAX: (800) 255-7874
QUOTES: QUOTES@NGP.COM
ORDERS: ORDERS@NGP.COM

THRESHOLD

INSTALLATION INSTRUCTIONS

- 1. Assemble ramp by interlocking sections together.
- 2. Cut ramp to fit.
- 3. Position return closed end (if ordered) on each side of ramp.
- 4. Drill and counter sink screw holes in ramp aligned with holes in RCE.
- 5. Install ramp with screws provided.
- 6. Caulk around base of ramp and RCE for moisture control.



NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118

FAX: (800) 255-7874
QUOTES: quotes@ngp.com
ORDERS: orders@ngp.com

CARSON CITY
3689 Arrowhead Drive
Carson City, NV 89706

