




RCE-30

Return Closed Ends for Ramps

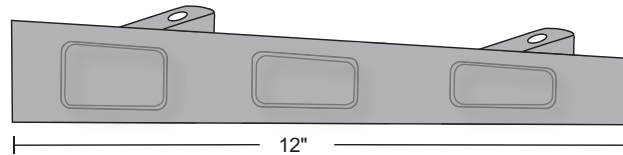

- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ 30" Length
- ▶ BHMA Certified to ANSI/BHMA A156.21
1,000 Lb. Load Test

- ▶ Return Closed Ends Provide an Attractive Finished Appearance to Ramps
- ▶ Available in Several Lengths and Can Be Trimmed to Accommodate Any Size Ramp Assembly



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS, RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS, RATED UP TO 1½ HOURS. CATEGORY J



ngp.com
1-800-NGP-RUSH

FAX: (800) 255-7874
QUOTES: QUOTES@NGP.COM
ORDERS: ORDERS@NGP.COM


THRESHOLD

INSTALLATION INSTRUCTIONS

1. Assemble ramp by interlocking sections together.
2. Cut ramp to fit.
3. Position return closed end (if ordered) on each side of ramp.
4. Drill and counter sink screw holes in ramp aligned with holes in RCE.
5. Install ramp with screws provided.
6. Caulk around base of ramp and RCE for moisture control.

FOR TWO PIECE RCE-30

1. Install 21" RCE first.
2. Butt 12" RCE section against the 21" RCE.
3. Drill and countersink screw holes in ramp aligned with holes in RCE.
4. Install with screws provided

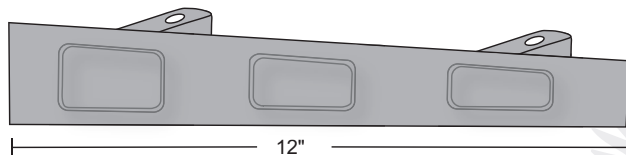

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118

FAX: (800) 255-7874
QUOTES: quotes@ngp.com
ORDERS: orders@ngp.com

CARSON CITY
3689 Arrowhead Drive
Carson City, NV 89706

