



Interlocking Rubber Ramp RR42





Materials & Finishes

Black rubber

- 12" wide x 1" tall
- BHMA certified to ANSI/BHMA A156.21
1,000 lb. load test
- Supplied with beveled ends - (end slope = 1:2). Specify if straight cut is required
- Rubber ramp sections may be combined with aluminum ramp components for higher rises, or with 6" flat aluminum interlocking threshold #957 for offset conditions
- Black silicone adhesive available to secure ramps without fasteners. Specify RR5007BL, each tube will secure 2 R50s 12" wide x 36" long (6 square feet.)
- Weight: 3.4 lbs./ft.
- Maximum length = 118"

Options:

RR5007BL black silicone adhesive

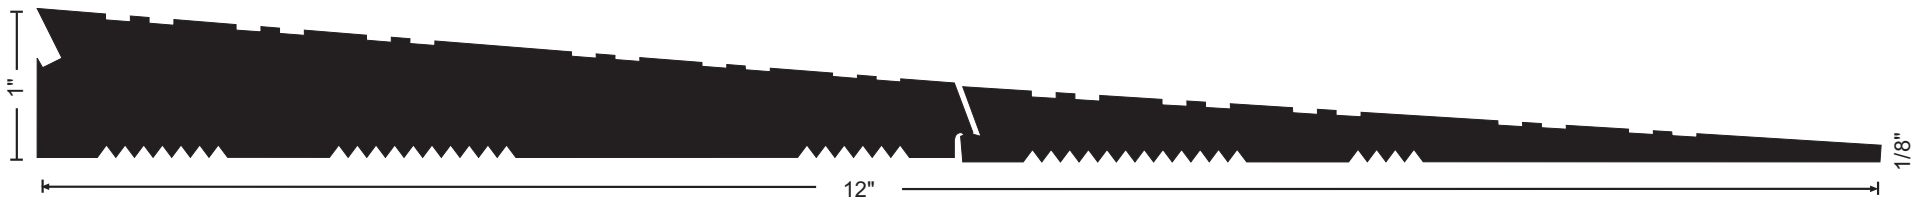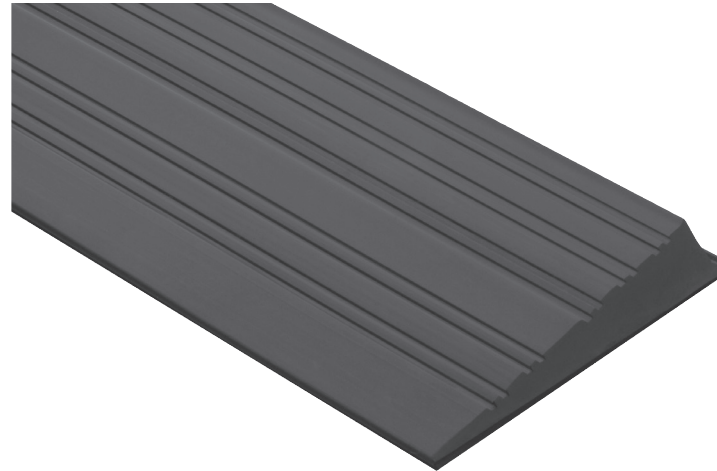

Project:

Submitted by:

Date:

Notes: