SS304

Half Mortise Stainless Steel Continuous Hinge

PRODUCT CUT SHEET

PROJECT:	
SUBMITTED BY:	
DATE:	
NOTES:	

For 1¾" Doors

- Heavy-Duty Type 304, 14-Gauge Stainless Steel
- Pin and Barrel Design
- Stainless Steel Hinge Pins
- Medical Type Self-Lubricating Flanged Bearings Between Each 2" Knuckle Provide Dust-Free Quiet and Smooth Operation
- For Doors Weighing up to 600 Lbs.
- 25-Year Warranty
- #¼-20 x ¾" TEK Screws for Metal Frames
- #10 x ½" TEK Screws for Metal Doors
- #10 x 1" Wood Screws for Wood Doors
- US32D (630) Brushed Finish
- Standard Lengths: 83", 85", 95", 119"

Options:

- Torx Security TEK Screws
- Cut To Net Length - Specify Door Handing
- Anti-Ligature Hospital Tip - Specify "ALHT"
- Dutch Door Prep - Specify Door Handing, Bottom Door Leaf Length, and Clearance Between Leafs
- Electric Power Transfer Prep
- US32 (629) Polished Finish
- Welded Tips for Non-Rising Pins

Note: For Door Sizing Refer to Installation Instruction.

HALF MORTISE (EDGE MOUNT)

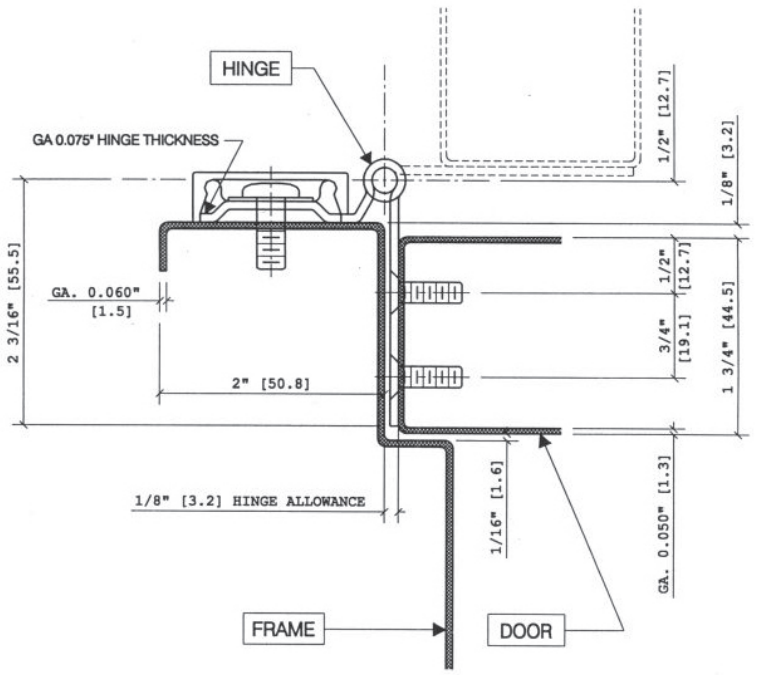

Fire-rated 3 hours on hollow metal doors and 90 minute on wood doors. Maximum size 4'0" x 10'0".

ANSI/BHMA Certified to A156.26 American National Standard for Continuous Hinges: Grade 1 - 150 lb. Door

NGP-CHG-SS304-PCS-1125-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS
4985 East Raines Road
Memphis, TN 38118

CARSON CITY
3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH