




Aluminum Ramp

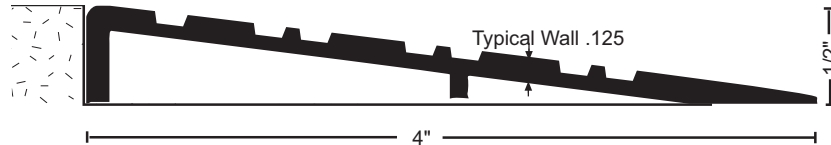

- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ Fluted Top
- ▶ BHMA Certified to ANSI/BHMA A156.21
1,000 Lb. Load Test

- ▶ Typical Wall Thickness: .125"
- ▶ #10 FH Zinc Plated Wood Screws Included



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS, RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS, RATED UP TO 1½ HOURS. CATEGORY J



ngp.com
1-800-NGP-RUSH

FAX: (800) 255-7874
QUOTES: QUOTES@NGP.COM
ORDERS: ORDERS@NGP.COM

