




L-GLF100

Square Profile Lite Kit for 1 3/4" Thick Doors and 3/16", 1/4", or 5/16" Glass

- 18 ga. cold rolled steel
- Mitered and welded corners
- Welded reinforcing clips at corners
- Countersunk mounting screw-holes
- #6 x 1-3/4" Phillips Truss Head SMS
- Gray Primer (GPZ) powder coat finish

Available Options

- Powder coat color options - see page L2
- False mullion bars (page L9)
- Torx Security Screws
- Galvanneal - A40 Steel
- Zinc electro-plating
- Glass & Glazing tape - See Glass Section
- Lead lining - .030" thick

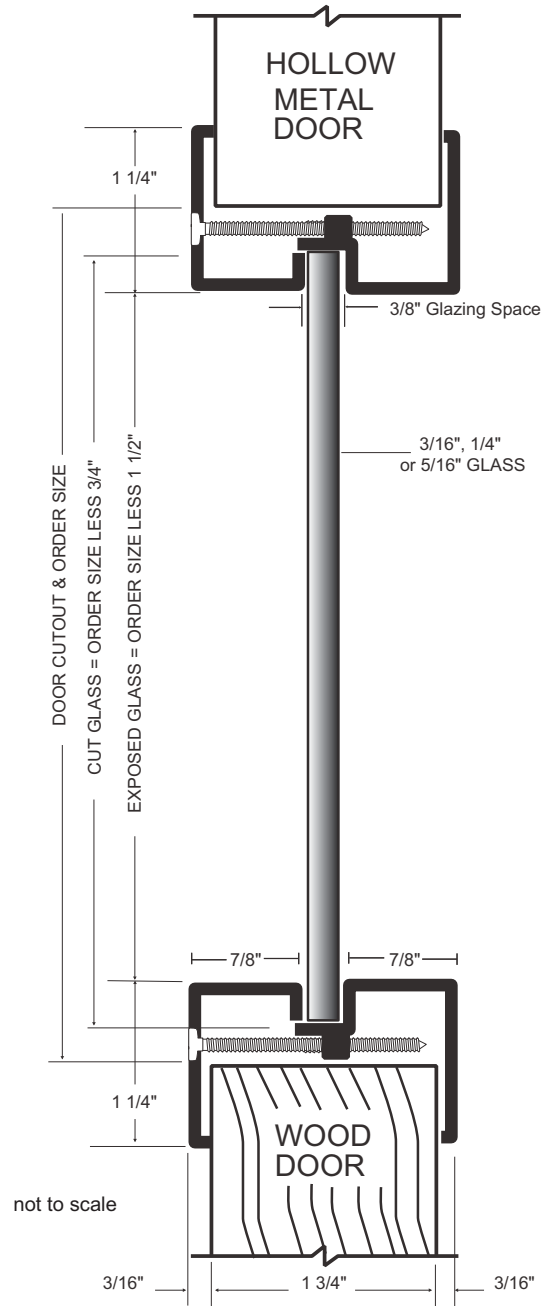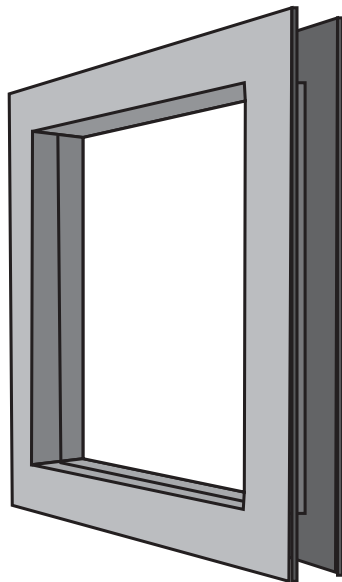

Designed for use on 1 3/4" thick doors manufactured within door industry tolerance of +/- 1/16".

False Mullion Lite Kits

- 1" wide steel channel
- Fits L-GLF100, L-GLF100-SP, L-GLF100-TB, L-GLF100-SP-TB, L-SG100, L-SG100-TB
- Mullion bars welded into both sides of Lite Kit
- Finished to match Lite Kit



Available Options

* Zinc electro-plating


To Order

Specify Lite Kit x G# (i.e.: G2, G3, G4 etc.)

If other than as illustrated, provide detail & suffix G-SP

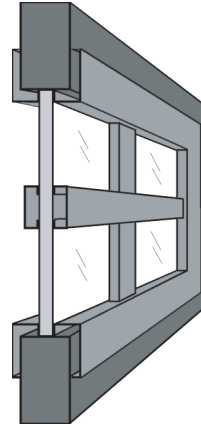


G2
(1 Bar)




G3
(2 Bars)




G4
(2 Bars)




G6
(3 Bars)




G8
(4 Bars)




G9
(4 Bars)




G10
(5 Bars)




G12
(5 Bars)




G15
(6 Bars)



G18
(7 Bars)



G21
(8 Bars)



G24
(9 Bars)