



# 229WHSS

## Nylon Brush Stainless Steel Automatic Door Bottom

### PRODUCT CUT SHEET

#### Material

Stainless Steel Type 304  
Synthetic Polymer: Polyamide  
Nylon Brush is Black


- ▶ BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Excellent Abrasion Resistance, Flexibility and Memory
- ▶ Moisture-Resistant
- ▶ Retains Insecticides Well
- ▶ Temperature Range -70°F to 425°F
- ▶ REACH and RoHS Compliant
- ▶ Not Effective Against Water Penetration
- ▶ Mounts on Push Side of Door
- ▶ Use with a Threshold for Maximum Sealing Capability
- ▶ Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ 36" and Longer May Be Cut up to 4" in the Field; Under 36" Should Not Be Cut in the Field, Order Net Length
- ▶ Minimum Length 11", Maximum Length 60"
- ▶ End Caps Furnished Standard
- ▶ Door Bottom is Handed. Right Hand Supplied Unless Specified. Units Under 36" Not Field Reversible. Please Specify Handing
- ▶ 7/8" Max Drop

#### Finishes

Brushed #4 Finish (US32D, 630)



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

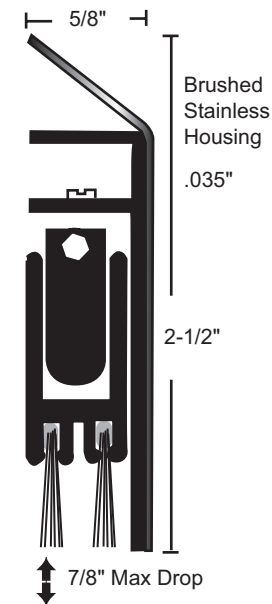

NGP-GKT-229WHSS-PCS-0125-A

#### NATIONAL GUARD PRODUCTS, INC.

##### MEMPHIS

4985 East Raines Road  
Memphis, TN 38118

##### CARSON CITY

3689 Arrowhead Drive  
Carson City, NV 89706

Fax: (800) 255-7874

Email: [info@ngp.com](mailto:info@ngp.com)

Quotes: [quotes@ngp.com](mailto:quotes@ngp.com)

Orders: [orders@ngp.com](mailto:orders@ngp.com)

[ngp.com](http://ngp.com)  
1-800-NGP-RUSH