



# 9500

## NPG-Edge® Intumescent Fire Seal

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

#### Material

Self-Adhesive Intumescent with PVC Cover



- ⊗ NPG-Edge® Sealing System/Smoke and Draft Control Gasketing Category "G" Classified
- ⊗ NPG Intumescent Materials are Formulated to Expand at 375°F to 400°F Up To 8-10 Times Their Original Thickness; Completely Sealing the Gap Around and Between Doors During a Fire
- ⊗ Moisture-Resistant
- ⊗ Modified Acrylic Pressure Sensitive Adhesive Protected by Release Liner
- ⊗ Provides High Initial Adhesion and Long Term Holding Power for Permanent Mounting in Exterior or Interior Locations
- ⊗ Resistant to Aging, Weathering, UV Radiation, Water, Detergent, Alcohol and the Influence of Chemicals
- ⊗ End Use Temperature Range of Adhesive, Long Term Exposure -30°F Up To 250°F
- ⊗ Shelf Life of Adhesive Prior to Installation is One Year when Stored at 75°F and 50% Relative Humidity or Less
- ⊗ Flame-Resistant
- ⊗ Temperature Range -60°F To 275°F
- ⊗ Anti-Microbial: Treated With an Anti-Microbial Additive to Inhibit the Growth of Microorganisms
- ⊗ REACH and RoHS Compliant
- ⊗ 1 9/16" Wide x 5/64" Tall
- ⊗ Available in 36", 48", 84", 96 and 108" Lengths
- ⊗ U.S. Pat. DES 417,739

#### Color

9500 Gray  
 9500DKB Brown



20, 45, 60, 90 Minute Rated Category B Wood  
 Doors Up To:  
 Single Swing 4'0" X 9'0", Perimeter Application  
 Pairs 8'0" X 9'0", Perimeter/Meeting Edge

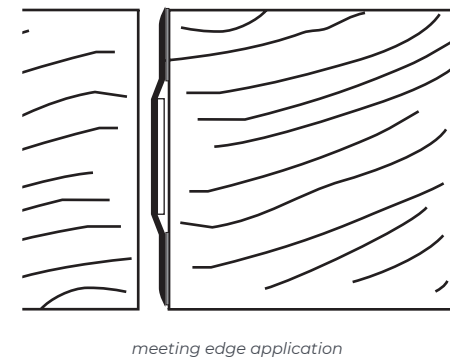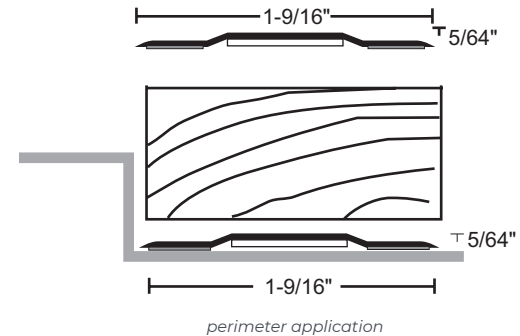

NGP-GKT-9500-PCS-1123-A

#### NATIONAL GUARD PRODUCTS, INC.

##### MEMPHIS

4985 East Raines Road  
 Memphis, TN 38118

##### CARSON CITY

3689 Arrowhead Drive  
 Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

**ngp.com**  
 1-800-NGP-RUSH