



HP90-MORT

Mortise Hardware Prep Filler

PRODUCT CUT SHEET

UL Certified Solution for Fire Doors When Either Removing Existing Hardware and/or Using a New Hardware Type Over Existing Hardware Prep's.



UL CERTIFIED FOR USE IN THE US AND CANADA

- Application Certified on Both Hollow Metal and Wood Fire-Rated Doors – up to 90-Minute
- Patent Pending
- Certified for Filling Mortise Lockset Cavities

PRODUCT CONSISTS OF:

- + HP90 – 4" x 6" Fire-Rated Panel
- + Steel Filler Plates: *(Powder Coated Primer Gray, Embossed With UL Mark)*
 - HP90-MEF1258, Edge Filler Plate
 - HP90-SF4875, Strike Filler Plate
- + Hardware Pack:
 - #10-32 x 1 3/4" FHPH SS Machine Screw
 - #8 x 3/4" FHPH SS Combo Screw
 - #12 x 1" FHPH SS Combo Screw
 - #8 x 3/4" FHPH SS SMS
 - #12 x 1" FHPH SS SMS
- + GapGuard™ Fire Caulk *(see Installation Instructions)*
- Sizes: Mortise Lockset Hardware Prep

FINISH:


Primer Gray, Powder Coat



SPECIAL NOTES:

- 90-minute rated UL Certified Miscellaneous Fire Door Accessory on UL10B and UL10C wood or hollow metal fire doors
- To retain UL Certification, the HP90-MORT must be installed using GapGuard™ Fire Caulk

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

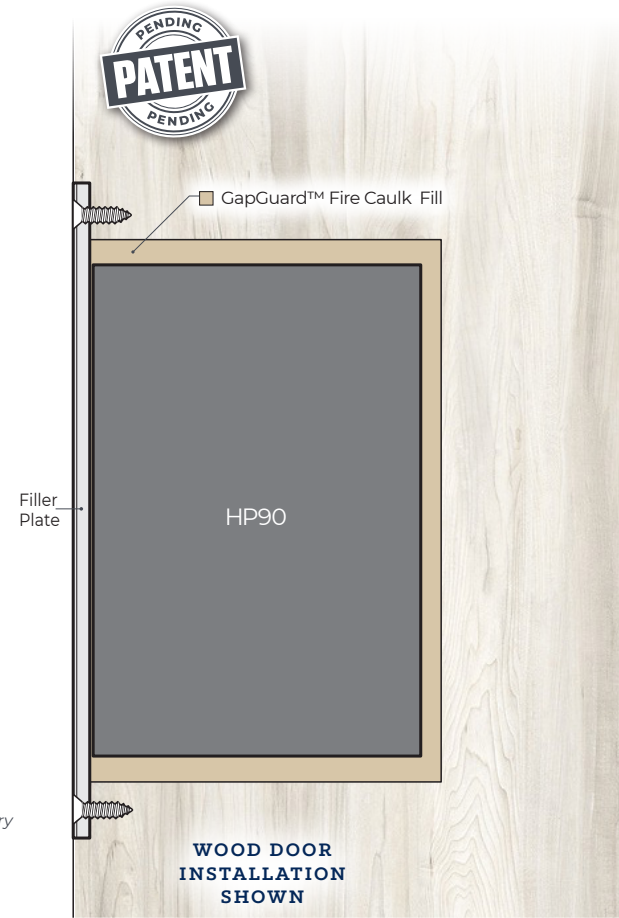

NGP-GAP-HP90-MORT-PCS-1223-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH